



OPEN

Reduction of nutrients, microbes, and personal care products in domestic wastewater by a benchtop electrocoagulation unit

SUBJECT AREAS:
APPLIED MICROBIOLOGY
ELECTROCHEMISTRY
CIVIL ENGINEERING

Received
1 December 2014

Accepted
2 March 2015

Published
23 March 2015

Correspondence and
requests for materials
should be addressed to
E.M.S. (esymonds@
mail.usf.edu)

E. M. Symonds¹, M. M. Cook¹, S. M. McQuaig², R. M. Ulrich¹, R. O. Schenck¹, J. O. Lukasik³,
E. S. Van Vleet¹ & M. Breitbart¹

¹University of South Florida, College of Marine Science, 1407th Avenue South, St. Petersburg, Florida, USA, ²St. Petersburg College, 2465 Drew Street, Clearwater, Florida, USA, ³BCS Laboratories, Inc., 4609-A NW 6th Street, Gainesville, Florida, USA.

To preserve environmental and human health, improved treatment processes are needed to reduce nutrients, microbes, and emerging chemical contaminants from domestic wastewater prior to discharge into the environment. Electrocoagulation (EC) treatment is increasingly used to treat industrial wastewater; however, this technology has not yet been thoroughly assessed for its potential to reduce concentrations of nutrients, a variety of microbial surrogates, and personal care products found in domestic wastewater. This investigation's objective was to determine the efficiency of a benchtop EC unit with aluminum sacrificial electrodes to reduce concentrations of the aforementioned biological and chemical pollutants from raw and tertiary-treated domestic wastewater. EC treatment resulted in significant reductions ($p < 0.05$, $\alpha = 0.05$) in phosphate, all microbial surrogates, and several personal care products from raw and tertiary-treated domestic wastewater. When wastewater was augmented with microbial surrogates representing bacterial, viral, and protozoan pathogens to measure the extent of reduction, EC treatment resulted in up to 7- \log_{10} reduction of microbial surrogates. Future pilot and full-scale investigations are needed to optimize EC treatment for the following: reducing nitrogen species, personal care products, and energy consumption; elucidating the mechanisms behind microbial reductions; and performing life cycle analyses to determine the appropriateness of implementation.

In order to protect public and environmental health, innovative technologies are needed to reduce the concentrations of emerging microbes¹ and chemicals² from domestic wastewater prior to discharge into the environment and/or water reuse. Fecal-borne pathogens, encompassing known and emerging bacteria, helminths, protozoa, and viruses, substantially contribute to human disease and mortality worldwide^{1,3}. Furthermore, it has been postulated that the input of personal care products (PCPs; a chemically diverse group of over-the-counter medications, insect repellents, antibiotics, and disinfectants) into aquatic environments or the drinking water supply could negatively affect wildlife and humans, respectively^{4,5}. Finally, it is well-understood that the removal of nutrients, principally nitrogen and phosphorus, from domestic wastewater is necessary to prevent the eutrophication of surface waters exposed to treated wastewater discharge. While many different wastewater treatment options exist, adequate reduction of all chemicals and microbes is extremely complex due to their great physical and structural diversity^{1,6}. It is therefore important to evaluate treatment technologies for their ability to remove a diverse range of contaminants, since a combination of approaches will likely be required to ensure safe discharge of treated effluent and/or water reuse.

Electrocoagulation (EC) has become increasingly popular over the last 25 years to treat a wide-variety of wastewaters as technological advances have made this technique more cost- and energy-efficient^{7–10}. The EC process applies electricity to sacrificial electrodes (typically aluminum or iron), which generates coagulants (e.g. aluminum hydroxide for an aluminum anode), destabilizes contaminants, enhances the suspension of particulates, and disrupts emulsions. Contaminants are either directly broken down or aggregated to form flocs that become buoyant as they associate with the gases generated by the concurrent electrolysis of water. Following EC, the floc is separated from the treated water via sedimentation and/or filtration. EC may be an advantageous treatment option as it does not require a constant supply of chemicals^{7–10} and consequently, may be more easily



implemented in a developing-country context where such chemicals are not readily available⁷. It has also been suggested that EC technology could be an effective decentralized drinking water treatment technology¹¹ and easily deployed as portable equipment for use in remote locations or in the event of emergencies¹².

The efficacy of EC to reduce various biological and chemical constituents found in water and wastewater under normal and emergency conditions has been investigated in several prior studies. When evaluating EC technologies for their use in treating potable water, Vik et al. determined significant removal of humic substances with EC treatment of surface waters¹³ and Zhu et al. ascertained effective removal of MS2 bacteriophages from synthetic freshwater¹⁴. In another study, even though the use of iron electrodes in EC treatment reduced MS2 bacteriophage by up to 6.5-log₁₀ in synthetic freshwater, natural levels of organic matter present in surface waters limited virus reductions to as little as 1.0-log₁₀¹⁵. Consequently, the use of aluminum electrodes was suggested to prevent the complexation of organic matter and iron ions that inhibit adequate flocculation and subsequent virus removal. Furthermore, EC treatment of surface waters is both technically and economically effective for the removal of algae¹⁶ and greatly reduces concentrations of fecal indicator bacteria¹⁷. In a recent laboratory study, EC decreased concentrations of the antibiotic tetracycline by nearly 99% in laboratory-made aqueous solutions¹⁸. With respect to the treatment of industrial wastewater, EC has also been extensively used, primarily with aluminum, iron, and steel electrodes, to reduce chemical oxygen demand (COD) as well as the concentrations of arsenic, fluoride, food and oil waste, heavy metals, nitrate, organic matter, phenolic and polymeric wastes, suspended particles, textile dyes, and refractory organic pollutants^{6,7,9,19–21}.

Unlike industrial wastewater, the application of EC to treat domestic wastewater has yet to be as thoroughly investigated. To date, several studies have shown that EC treatment of domestic wastewater (natural and synthetic) can greatly reduce turbidity by more than 90%, COD by up to 75%, and provide up to 'complete disinfection' per the absence of fecal coliforms in treated effluents^{17,22–28}. Additionally, Ozyonar et al. observed phosphorus removal efficiencies as great as 98% with EC treatment of domestic wastewater and determined that aluminum electrodes provided the greatest removal of phosphorus, as well as COD and turbidity²⁸. The incorporation of EC as a tertiary or polishing treatment has also been suggested as it can greatly reduce phosphate concentrations in domestic wastewater after secondary treatment via anaerobic digestion or activated sludge treatment^{23,29}.

The application of EC to treat domestic wastewater represents a potential alternative and/or addition to traditional treatment due to cost effectiveness, ease in operation, design simplicity, and its successful use to treat other waters; however, the full potential of EC to reduce multiple types of microbes, PCPs, and nitrogen species from domestic wastewater has yet to be fully understood^{7,30}. The primary objective of this study was to determine the efficiency of a benchtop

EC unit, equipped with aluminum electrodes, to reduce nutrients (nitrate + nitrite, nitrite, ammonium, and phosphate), a suite of 18 PCPs, and six types of microbes from both raw and tertiary-treated domestic wastewater in order to further understand the potential of EC as a principal or polishing treatment, respectively. The PCPs assessed in this study represent those identified as potential threats to environmental and/or human health and routinely studied in U.S. Environmental Protection Agency (US EPA) Clean Water Act programs³¹. To investigate the potential of EC treatment to reduce microbial contaminants, several commonly used microbial surrogates were chosen to represent bacterial, parasitic protozoan and viral pathogens as well as to allow for culture- and molecular-based analyses.

Results and discussion

Nutrients. Significant (>95%; $p < 0.0003$, $\alpha = 0.05$) reductions in phosphate were observed upon EC treatment of both raw wastewater and tertiary treated wastewater (Table 1). These results corroborate previous findings demonstrating up to 100% removal using aluminum sacrificial electrodes and further suggest that EC may be an especially useful treatment technology to achieve enhanced phosphorus reductions from domestic wastewater^{28,29,32}. Despite the consistent reduction of phosphate by EC, the extent of reduction for the other nutrients differed for raw wastewater compared to tertiary-treated wastewater (Table 1).

Significant decreases in nitrate + nitrite were observed (48.35%; $p = 0.0007$, $\alpha = 0.05$) during the treatment of tertiary-treated wastewater; however, no significant reduction in nitrate + nitrite was achieved during the treatment of raw wastewater. Additionally, even though significant increases in nitrite and ammonium were observed during EC treatment of tertiary-treated wastewater, significant reductions (>14%; $p < 0.0087$; $\alpha = 0.05$) were observed after EC treatment of raw wastewater. Previous studies on nitrate reduction from ground and surface water for potable water treatment have shown that EC with iron and aluminum blades is more efficient than chemical coagulation; however, the extent of nitrate reduction depended upon the EC conditions (e.g. current density applied, electrode connections) and the characteristics of the water under treatment (e.g. pH, initial nitrate concentration, total dissolved solids)^{33,34}. Since up to 89.7% nitrate removal from aqueous solutions has been observed by Malakootian et al.³⁴, future research is necessary to identify the optimum EC conditions for reduction of various nitrogen species from domestic wastewater and treated effluent.

Microbes. Six commonly used microbial surrogates were analysed using a combination of molecular- and culture-based techniques. The double-stranded DNA human polyomavirus (HPyV) and single-stranded RNA pepper mild mottle virus (PMMoV) were measured as surrogates for DNA and RNA viruses in wastewater, respectively,

Table 1 | Mean \pm standard deviation of nutrient concentrations before and after EC treatment of raw wastewater and tertiary-treated wastewater with the benchtop unit. A negative *t*-statistic signifies an increase in nutrient concentrations after EC treatment. When a two-tailed student's *t*-test (*t*) or Wilcoxon Rank Sum test (*S*) revealed a positive, significant difference ($\alpha = 0.05$) between pre- and post- EC treatment concentrations, the mean percent reduction was calculated

Wastewater Sample	Nutrient	Mean concentration \pm standard deviation (μM)		Two-tailed student's <i>t</i> -test results	% Mean reduction
		Pre-EC treatment	Post-EC treatment		
Raw	Nitrate + Nitrite	11.20 \pm 0.79	10.63 \pm 0.31	$t = 1.36$, $p = 0.2218$	N/A
	Nitrite	0.52 \pm 0.07	0.33 \pm 0.06	$t = 3.83$, $p = 0.0087$	64.48
	Ammonium	1349.34 \pm 10.88	1155.76 \pm 63.67	$t = 5.99$, $p = 0.0079$	14.35
	Phosphate	62.76 \pm 20.17	2.65 \pm 0.42	$t = 19.93$, $p = 0.0003$	95.79
Tertiary-treated	Nitrate + Nitrite	2.88 \pm 0.22	1.49 \pm 0.38	$t = 6.34$, $p = 0.0007$	48.35
	Nitrite	0.11 \pm 0.03	0.41 \pm 0.02	$t = -15.87$, $p < 0.0001$	N/A
	Ammonium	3.08 \pm 0.19	4.78 \pm 0.29	$t = -9.74$, $p < 0.0001$	N/A
	Phosphate	3.95 \pm 0.20	0.15 \pm 0.02	$t = 37.87$, $p < 0.0001$	96.33



using molecular techniques^{35–38}. Fecal-indicator bacteria (FIB; fecal coliforms and *Enterococcus* spp.) were measured as surrogates for wastewater-related bacteria using culture-based techniques as well as molecular techniques for *Enterococcus* spp.^{3,39}. To quantify the extent of microbial reduction, the EC unit was used to treat domestic wastewater augmented with the aforementioned bacteria and viruses as well as two other commonly used microbial surrogates that are not typically found in wastewater at high concentrations: male-specific (F+) bacteriophages (MS2)⁴⁰ and *Bacillus subtilis* spores (surrogate for wastewater-related, protozoan parasites; i.e. *Cryptosporidium*³). Both MS2 bacteriophages and *B. subtilis* spores were analysed using culture-based techniques.

EC treatment resulted in significant reductions ($p < 0.0286$, $\alpha = 0.05$), ranging from 81.567% to >99.999998%, of all microbial surrogates tested in all domestic wastewater samples (Table 2). These results suggest that EC with aluminum electrodes is an effective treatment for the wide-range of pathogen types present in domestic wastewater. Furthermore, EC treatment resulted in a greater than 4-log₁₀ reduction for all microbial surrogates in augmented domestic wastewater. Although this study does not attempt to discern the mechanisms behind “the observed reductions after” EC treatment, previous studies on synthetic freshwater and wastewater have suggested that the primary microbial removal mechanism during EC is due to the enmeshment of microbes to flocs and subsequent separation of flocs from treated water by filtration¹². It is also possible that the oxidants produced during EC (e.g. HO·, O₃, H₂O₂) provide additional microbial reductions via disinfection as a result of cell/capsid membrane damage^{15,17}. The effective reduction of FIB observed (as great as 7-log₁₀) in this study supports the results of previous investigations on EC treatment of domestic wastewater, which cite reductions as high as 4-log₁₀^{17,22,23,25}. Finally, this is the first study to our knowledge to demonstrate that EC can significantly reduce concentrations of viral and parasitic protozoan surrogates in domestic wastewater.

Personal care products. EC treatment of raw domestic wastewater significantly ($p < 0.05$, $\alpha = 0.05$) reduced concentrations of the following PCPs: acetaminophen, DEET, gemfibrozil, ibuprofen, iopromide, salicylic acid, triclocarban, and triclosan (Table 3). While the initial concentrations of many PCPs in tertiary-treated wastewater were below the process limit of detection (pLOD), EC treatment of tertiary-treated wastewater significantly ($p < 0.05$, $\alpha = 0.05$) decreased concentrations of iopromide, sulfamethoxazole, and thiabendazole (Table 3). Although this study does not attempt to discern the EC removal mechanisms associated with the different PCPs, it is likely that PCP adsorption to flocs was a major removal mechanism⁴¹, particularly for compounds with higher octanol-water partition coefficient (K_{ow}) values (e.g. gemfibrozil, ibuprofen, triclocarban, and triclosan). It is also possible that compounds with lower K_{ow} values (e.g., acetaminophen, DEET, iopromide, salicylic acid, sulfamethoxazole, and thiabendazole) were removed by the destabilizing effects of EC, which result in charge neutralization, decreased solubility, and ultimately, enhanced aggregation to flocs⁴².

The differences in PCP removal by EC treatment observed for raw wastewater and tertiary-treated wastewater are likely the result of chemical differences between the two water types (e.g. total suspended solids, which differed on average by two orders of magnitude that influence chemical adsorption to flocs^{7–10,41,42} (195 mg/L and 1 mg/L in raw wastewater and tertiary-treated wastewater, respectively; courtesy of South Cross Water Reclamation Facility)). Since it has been previously reported that current intensity greatly influences the extent of tetracycline (a common antibiotic) removal from aqueous solutions during EC with aluminum electrodes¹⁸, it is possible that the current intensity was suboptimal for maximizing PCP removal during this study. Future research is needed to optimize the

EC treatment process for removal of a wide-range of PCPs from domestic wastewater after various primary and secondary treatments in order to understand the full potential of EC to reduce PCP concentrations.

Conclusions

This study demonstrates that a benchtop EC unit outfitted with aluminum electrodes can concomitantly reduce concentrations of phosphate, microbial surrogates representing several major pathogen types (DNA/RNA viral, bacterial, protozoan parasite), as well as several PCPs in domestic wastewater. By providing the first information about the ability of EC to reduce concentrations of viral and parasitic protozoan surrogates, as well as PCPs, this study enhances previous assertions that EC is a promising sustainable wastewater treatment technology for domestic wastewater^{7,12,30}. While these collective results highlight the potential of EC for domestic wastewater treatment, further research is needed to address a number of outstanding issues. First, future work should attempt to discern the mechanisms behind the observed reductions as well as to optimize EC configurations and conditions to enhance the removal of PCPs and nitrogen species from domestic wastewater. Secondly, it will be necessary to optimize the EC treatment conditions to minimize energy consumption and the incorporation of renewable energy sources⁴³. Future pilot-scale and full-scale studies assessing the effectiveness of EC treatment of domestic wastewater are needed to fully understand the feasibility of this treatment option with respect to removing nutrients, microbes, and PCPs both from raw wastewater as a stand-alone treatment or as a polishing technology for refining tertiary-treated wastewater from standard wastewater treatment plants. Additionally, full life-cycle assessments are needed in order to understand the appropriateness of EC technologies as an option for decentralized and/or centralized domestic wastewater treatment prior to their implementation.

Methods

Benchtop electrocoagulation unit. The demonstration, benchtop EC unit (United States patent number 7211185 B2 by Powell Water Systems, Inc.; Centennial, CO, USA) evaluated in this study was comprised of a non-conductive, acrylic-resin chamber (35.6 × 5.4 × 2.5 cm) with nine aluminum plates (each 36.8 × 2.5 × 0.3 cm) vertically arranged and spaced 0.3 cm apart such that they occupied approximately 45% of the chamber volume (Figure 1). A 110-volt AC to DC power converter, set to 98 volts, was used to supply electricity to the unit via three electrical connections to the first, fifth, and ninth blade, resulting in two anodes and one cathode. During EC treatment, the actual current delivered ranged from 8.5–15.0 amps for raw domestic wastewater and 12.0–15.5 amps for tertiary-treated domestic wastewater. A peristaltic pump (Cole-Parmer® Masterflex Peristaltic Pump System 77910; Vernon Hills, IL, USA) was used to pump wastewater up through the unit chamber, which recirculated wastewater throughout the benchtop unit at a rate of 0.94 L/min. Wastewater was recirculated for 1 min per every liter of wastewater being treated. The resulting flocculant was removed from the EC unit effluent via filtration with paper filters that retain 11 μm particles (Whatman Qualitative Grade Plain Circles Grade 1; GE Healthcare Bio-Sciences, Pittsburgh, PA, USA). Since the aluminum blades become oxidized over time, they were cleaned with a sandblaster after every 12 L of wastewater treated by the EC unit to physically remove the oxidized portion of the aluminum blade.

Experimental design. Raw influent (post-grit removal) and tertiary-treated (de-chlorinated) effluent were collected in sterile, plastic HDPE carboys from South Cross Bayou Water Reclamation facility (activated sludge plant with tertiary treatment) in St. Petersburg, Florida, USA. The tertiary-treated domestic wastewater received the following treatment prior to collection: grit removal, primary clarification, secondary treatment with an activated sludge system, and finally tertiary treatment with sand filtration, chlorination, and de-chlorination. Carboys were stored at 4°C in the dark and all experiments were conducted within 12 h of collection. Given the large number of analytes and logistical limitations, twice the minimum anticipated number of trials ($n = 4$) were collected before and after EC treatment in order to test the reduction efficiency of the EC unit. Four trials were executed with both raw wastewater and treated effluent, with each trial requiring an 18-L sample. From each sample, 6.1 L were isolated before treatment and the remaining volume was treated with the EC unit and filtered as described above. The EC unit was cleaned with 1 L analytical grade methanol and rinsed with 5 L DI water after each trial. Process controls, consisting of DI water that was recirculated through the EC unit, were collected after the second and fourth trial to ensure no cross-contamination between trials. All pre- and post-



Table 2 | Mean \pm standard deviation ($n = 4$ unless indicated otherwise; $^a n = 2$ and $^b n = 3$) of bacteria and virus concentrations, two-tailed student's t -test (t) or Wilcoxon Rank Sum test (S) results, and mean percent reduction from domestic wastewater before and after EC treatment. Analyte concentrations are described as less than the process limit of detection ($< pLOD$) when undetected; < 0.01 fecal indicator bacteria cfu/ml, $^a 2.08 \times 10^2$ HPyV targets/ml, $^a 1.09 \times 10^2$ PMMoV targets/ml, $^a 0.1$ MS2 bacteriophage pfu/ml, and $^a 1.00 \times 10^3$ *Enterococcus* spp. targets/ml with IC-NASBA. For molecular analyses, analyte concentrations are considered positive but below the process limit of quantification ($\pm BLOQ$) when at least one replicate is $\pm BLOQ$: $^b 5.00 \times 10^3$ *Enterococcus* spp. targets/ml (qPCR), $^b 2.00 \times 10^3$ *Enterococcus* spp. targets/ml (IC-NASBA), and $^b 2.19 \times 10^2$ PMMoV targets/ml

Wastewater Sample	Analyte	Mean concentration \pm standard deviation per milliliter		Test statistic and p-value	% Mean reduction
		Pre-EC treatment	Post-EC treatment		
Raw	<i>Enterococcus</i> spp. (cfu)	$4.701 \times 10^2 \pm 1.50 \times 10^2$	$< pLOD^c$	$S = 26.00, p = 0.0286$	> 99.998
	Fecal coliform (cfu)	$1.95 \times 10^2 \pm 2.29 \times 10^2$	$< pLOD^c$	$S = 26.00, p = 0.0286$	> 99.995
Tertiary-treated	HPyVs (qPCR target)	$2.69 \times 10^3 \pm 8.16 \times 10^2$	$< pLOD^d$	$S = 26.00, p = 0.0286$	> 92.252
	PMMoV (qPCR target)	$5.47 \times 10^4 \pm 1.64 \times 10^4$	$< pLOD^e$	$S = 26.00, p = 0.0286$	> 99.800
	<i>Enterococcus</i> spp. (cfu)	$5.43 \times 10^{-2} \pm 2.54 \times 10^{-2}$	$< pLOD^c$	$S = 26.00, p = 0.0286$	> 81.567
	Fecal coliform (cfu)	$7.40 \times 10^1 \pm 4.05 \times 10^1$	$< pLOD^d$	$S = 26.00, p = 0.0286$	> 99.986
	HPyVs (qPCR target)	$< pLOD^d$	$< pLOD^d$	N/A	N/A
	PMMoV (qPCR target)	$< pLOD^e$	$< pLOD^e$	N/A	N/A
Spiked raw	<i>Bacillus subtilis</i> (cfu)	$3.80 \times 10^6 \pm 3.74 \times 10^5$	$3.00 \times 10^2 \pm 1.41 \times 10^0$	$S = 26.00, p = 0.0286$	> 99.999996
	<i>Enterococcus</i> spp. (cfu)	$1.25 \times 10^8 \pm 1.56 \times 10^7$	$2.15 \times 10^0 \pm 4.12 \times 10^0$	$S = 26.00, p = 0.0286$	> 99.999998
	<i>Enterococcus</i> spp. (qPCR target)	$1.37 \times 10^6 \pm 1.40 \times 10^5$	$\pm BLOQ^h$	$S = 26.00, p = 0.0286$	> 99.507
	<i>Enterococcus</i> spp. (NASBA target)	$1.15 \times 10^6 \pm 1.72 \times 10^5$	$< pLOD^g$	$S = 26.00, p = 0.0286$	> 99.913
	Fecal coliform (cfu)	$1.22 \times 10^6 \pm 2.61 \times 10^5$	$8.13 \times 10^{-1} \pm 9.10 \times 10^{-1b}$	$t = 9.33, p = 0.0026$	> 99.99993
	HPyVs (qPCR target)	$6.29 \times 10^5 \pm 2.00 \times 10^5$	$< pLOD^d$	$S = 26.00, p = 0.0286$	> 99.967
	PMMoV (qPCR target)	$6.38 \times 10^6 \pm 2.35 \times 10^6$	$< pLOD^e$	$S = 26.00, p = 0.0286$	> 99.998
	MS2 bacteriophage (pfu)	$3.72 \times 10^4 \pm 3.82 \times 10^3$	$< pLOD^f$	$S = 26.00, p = 0.0286$	> 99.9997
	<i>Bacillus subtilis</i> (cfu)	$3.60 \times 10^6 \pm 3.69 \times 10^5$	$7.45 \times 10^2 \pm 6.43 \times 10^2$	$t = 20.23, p = 0.0003$	> 99.989
	<i>Enterococcus</i> spp. (cfu)	$1.44 \times 10^6 \pm 1.03 \times 10^5$	$5.67 \times 10^1 \pm 7.03 \times 10^1$	$t = 27.88, p = 0.0001$	> 99.996
Spiked tertiary-treated	<i>Enterococcus</i> spp. (qPCR target)	$1.68 \times 10^6 \pm 1.40 \times 10^5$	$\pm BLOQ^h$	$S = 26.00, p = 0.0286$	> 99.702
	<i>Enterococcus</i> spp. (NASBA target)	$1.56 \times 10^6 \pm 1.04 \times 10^5$	$\pm BLOQ^i$	$S = 26.00, p = 0.0286$	> 99.872
	Fecal coliform (cfu)	$1.47 \times 10^6 \pm 6.24 \times 10^4$	$3.38 \times 10^1 \pm 4.59 \times 10^1$	$t = 47.05, p < 0.0001$	> 99.998
	HPyVs (qPCR target)	$7.69 \times 10^5 \pm 2.81 \times 10^5$	$< pLOD^d$	$S = 26.00, p = 0.0286$	> 99.973
	PMMoV (qPCR target)	$1.24 \times 10^7 \pm 6.26 \times 10^6$	$\pm BLOQ^j$	$S = 26.00, p = 0.0286$	> 99.998
	MS2 bacteriophage (pfu)	$2.98 \times 10^4 \pm 5.34 \times 10^3$	$< pLOD^f$	$S = 26.00, p = 0.0286$	> 99.9996



Table 3 | Mean \pm standard deviation of personal care product concentrations before and after EC treatment of raw and tertiary-treated wastewater with the benchtop unit ($n = 4$, unless otherwise noted). Any undetected analytes are listed as less than the reported process limit of detection ($< \text{pLOD}$). When a two-tailed student's t -test (t) or Wilcoxon Rank Sum test (S) revealed a positive, significant difference ($\alpha = 0.05$) between pre- and post-EC treatment concentrations, the mean percent reduction was calculated. Results that exceeded the calibration range but did not saturate the instrument detector are indicated with an E . Results that were likely underestimations (laboratory control sample spike below the control limit) are indicated with *

Analyte	Raw wastewater				Tertiary-treated wastewater			
	Mean concentration \pm standard deviation (ng/L)		Test statistic and p-value	% Mean reduction	Mean concentration \pm standard deviation (ng/L)		Test statistic and p-value	% Mean reduction
	Pre-EC treatment	Post-EC treatment			Pre-EC treatment	Post-EC treatment		
Acetaminophen	55750 \pm 28000 ^E	28000 \pm 4243 ^E	$S = 26.00, p = 0.0286$	49.78	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A
Caffeine	31250 \pm 3202 ^E	26250 \pm 4787 ^E	$S = 23.00, p = 0.1714$	N/A	$< \text{pLOD}$	72 \pm 3	N/A	N/A
Carbamazepine	130 \pm 16	125 \pm 6	$S = 20.00, p = 0.6564$	N/A	165 \pm 6	178 \pm 10	N/A	N/A
DEET	4075 \pm 263	3400 \pm 424 ^E	$t = 2.70, p = 0.0354$	16.56	29 \pm 1	68 \pm 12	N/A	N/A
Gemfibrozil	2700 \pm 13	2350 \pm 82 ^E	$t = 4.58, p = 0.0038$	12.96	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A
Ibuprofen	12000 \pm 817 ^E	9950 \pm 900 ^E	$t = 3.37, p = 0.0150$	17.08	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A
Meprobamate	4600 \pm 653 [*]	3325 \pm 619 ^{*,E}	$S = 26.00, p = 0.0286$	24.77	505 \pm 31	350 \pm 26	$t = 7.67, p = 0.0003$	31.00
Naproxen	655 \pm 48	660 \pm 82 ^E	$t = 0.11, p = 0.9193$	N/A	588 \pm 24 ^E	645 \pm 44 ^E	N/A	N/A
Naproxen	11250 \pm 500 ^E	11250 \pm 500 ^E	$S = 18.00, p = 1.0000$	N/A	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A
Phenylethanolamine	$< \text{pLOD}$	130 \pm 0 ($n=2$)	N/A	N/A	183 \pm 15	208 \pm 15	N/A	N/A
Primidone	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A	$< \text{pLOD}^*$	$< \text{pLOD}^*$	N/A	N/A
Salicylic Acid	32500 \pm 5568	9425 \pm 961 ^E	$S = 26.00, p = 0.0286$	71.00	61 ($n=1$)	78 \pm 15	N/A	N/A
Sulfamethoxazole	1925 \pm 310	1700 \pm 548 ^E	$t = 0.72, p = 0.5013$	N/A	24 \pm 5	$< \text{RL}$	$S = 26.00, p = 0.0286$	58.76
Thiabendazole	$< \text{pLOD}$	15 \pm 1	N/A	N/A	20 \pm 1	18 \pm 1	$t = 3.00, p = 0.0240$	10.00
Triclocarban	728 \pm 200	113 \pm 75	$t = 5.77, p = 0.0012$	84.54	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A
Triclosan	1350 \pm 238	248 \pm 89	$t = 8.68, p = 0.0001$	81.67	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A
Trimethoprim	488 \pm 54	508 \pm 48 ^E	$t = 0.56, p = 0.5986$	N/A	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A
Warfarin	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A	$< \text{pLOD}$	$< \text{pLOD}$	N/A	N/A

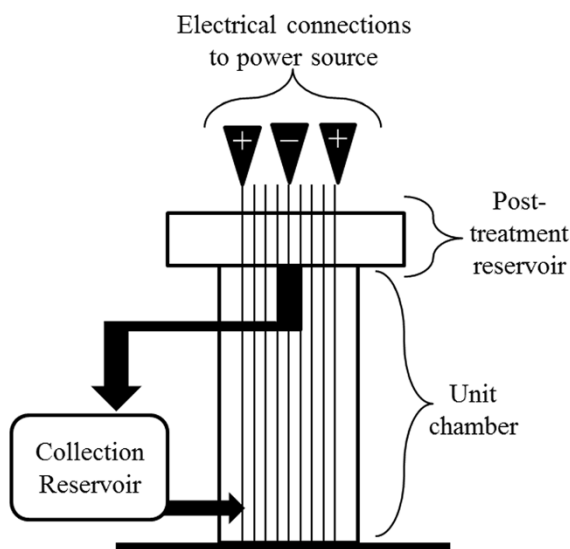


Figure 1 | The benchtop electrocoagulation unit with nine aluminum blades arranged vertically in the unit chamber. Electrical connections on the first, fifth, and ninth blades were connected to a 110-volt AC to DC power converter. A peristaltic pump re-circulated wastewater up through the unit chamber, into the post-treatment reservoir, and into the collection reservoir.

treatment samples, as well as process controls, were analyzed for nutrients, microbes, and PCPs.

In order to quantify the reduction efficiency of microbes, 1-L wastewater influent and effluent samples were augmented separately with concentrated surrogates for bacteria (*Enterococcus faecalis* ATCC-29212TM and *Escherichia coli* strain C600), viruses (JC HPyV ATCC-VR-1583TM, PMMoV (obtained from Scott Adkins; USDA), and MS2 bacteriophages), and parasitic protozoa (*B. subtilis* spores) (see Supplementary Information). Four trials were executed for both the raw wastewater and tertiary-treated effluent. Twenty-milliliter and 120-ml aliquots of the spiked-wastewater were collected prior to treatment with the EC unit for samples augmented with bacteria and viruses, respectively. The remaining volume was treated with the benchtop EC unit as described above. The EC unit was cleaned between each trial and one process control was collected upon completion of the fourth trial.

Nutrient analyses. Four sets of pre- and post-EC treatment samples of raw wastewater and tertiary-treated wastewater samples, along with two process controls, were analyzed in duplicate by the Oceanic Nutrient Laboratory at the University of South Florida, College of Marine Science for nitrate + nitrite, nitrite, ammonium, and phosphate. Due to the high nutrient concentrations in raw wastewater, pre-EC treatment raw wastewater samples were diluted to 2.4% final concentration with deionized water prior to analysis. The analytical methods used for nitrate + nitrite, nitrite, ammonium, and phosphate followed the recommendations of Ref. 44 and were analyzed using a five-channel Technicon Autoanalyzer II (SEAL Analytical, Mequon, WI, USA) upgraded with new heating baths, proportional pumps, colorimeters, improved optics, and an analog to digital conversion system (New Analyzer Program v. 2.40; Waters Corporation, Milford, MA, USA). To extend the dynamic range to 30 μM , the ammonium technique was modified by decreasing the flow rates for the nitroprusside, hypochlorite, phenolate, citrate, sample, air bubble, and waste draw to 50 μl , 50 μl , 50 μl , 320 μl , 600 μl , 160 μl , and 1200 μl per minute, respectively.

Nutrient standards were run in triplicate before and after analysis, as well as a check standard in the middle of the run to correct for any drift in sensitivity. The detection limits for nitrate + nitrite, nitrite, ammonium, and phosphate were 0.22 μM , 0.02 μM , 0.38 μM , and 0.09 μM , respectively. All method blanks were negative. Process controls for both experiments had low levels of nitrate + nitrite, nitrite, ammonium, and phosphate; however, the concentrations were less than the standard deviations for replicate samples.

Microbial analyses. Human polyomavirus (HPyV) and pepper mild mottle virus (PMMoV). All samples were processed as previously described⁴⁵. Briefly, 12 ml of sample were 0.45- μm filtered and concentrated to 200 μl using Amicon Ultra-15 centrifugal filter units (EMD Millipore, Billerica, MA, USA). Viral concentrates were stored at 4°C overnight and DNA and RNA were simultaneously purified within 24 h of the experiment using the QIAmp MinElute Virus Spin Kit (Qiagen, Valencia, CA, USA), following manufacturer's instructions and eluting with 50 μl molecular grade water. cDNA was immediately generated by reverse transcription from RNA templates using random hexamers and Superscript III First Strand Synthesis for RT-PCR (Invitrogen, Carlsbad, CA, USA) per manufacturer's instructions. Extraction

blanks, containing only the kit reagents, were also processed to ensure no cross-contamination among samples. RNA was stored at -80°C and DNA and cDNA were stored at -20°C.

Using previously published assays, quantitative PCR (qPCR) was used to determine the concentrations of HPyV³⁶ and PMMoV³⁵ following the established guidelines for qPCR⁴⁶ (see Supplementary Information). The lowest standard dilution within the linear dynamic range of the standard curve was considered the limit of quantification (LOQ) and was 500 and 100 target gene copies per reaction for HPyV and PMMoV, respectively. When no fluorescence was detected, the concentration of HPyV and PMMoV was considered 'less than the limit of detection' (<LOD). If fluorescence was detected at levels less than the LOQ, then the concentration was reported as positive but below the LOQ (+BLOQ). All extraction blanks and no-template controls were negative and PCR inhibition was only observed in one process control for the HPyV assay. All process blanks were negative for HPyV. For PMMoV, the process blanks were all negative except those that were +BLOQ for the experiments executed with augmented wastewater. Mean virus-target concentrations were back-calculated to reflect all sample dilutions (nucleic acid purification through qPCR detection) and the original sample volume concentrated. The process limit of quantification (pLOQ), an ideal estimation assuming 100% recovery, was 417 targets/ml for HPyV qPCR and 219 targets/ml for PMMoV RT-qPCR. The process limit of detection (pLOD) was assumed to be half the pLOQ for both assays.

Fecal indicator bacteria. To determine the concentrations of fecal indicator bacteria (FIB) in all natural and augmented domestic wastewater samples before and after EC treatment as well as in all process controls, multiple dilutions of each sample were filtered onto gridded, 0.45- μm -pore size nitrocellulose filters (Millipore, Billerica, MA, USA) in triplicate. Fecal coliforms were cultured on mFC agar⁴⁷, with incubation at 44 \pm 0.5°C for 24 h. All blue colonies were considered fecal coliforms and used to enumerate total concentrations of fecal coliforms. Enterococci were enumerated on mEI agar, with incubation at 41 \pm 0.5°C for 48 h³⁹. Resulting bacterial colonies with a blue halo were recorded as enterococci. The maximum volume filtered was 100 ml; therefore, the theoretical process limit of detection (pLOD) was 1 colony forming unit (cfu)/100 ml. No FIB colonies grew on method blanks or process controls.

The concentration of enterococci in the augmented domestic wastewater samples was also determined using qPCR following standard methods⁴⁸ and internal control nucleic acid based sequence amplification (IC-NASBA) (see Supplementary Information). Briefly, 1 ml volumes of augmented domestic wastewater before and after EC treatment were filtered onto 0.45- μm -pore size HV polyvinylidene difluoride filters (Millipore, Billerica, MA, USA) within 24 h of collection. RNA was purified from filters designated for IC-NASBA analysis using the RNeasy[®] Mini Kit (Qiagen, Valencia, CA, USA). DNA was purified from filters designated for enterococci qPCR using the DNeasy[®] Blood & Tissue Kit (Qiagen, Valencia, CA, USA). RNA and DNA were eluted using 50 μl and 100 μl of nuclease-free water, respectively. All samples were analyzed in triplicate. The LOQ for the qPCR and IC-NASBA assays was 100 cells per reaction and results were reported as +BLOQ or <LOD, as previously described for HPyV and PMMoV. The pLOQ was 5,000 cells/ml for the qPCR analysis and 2,000 cells/ml for the IC-NASBA analysis. The pLOD was assumed to be half the pLOQ for both assays. All extraction blanks and no-template controls were negative and no PCR inhibition was observed. All process blanks were negative.

Bacillus subtilis spores. All augmented pre-and post-EC treatment samples and process controls were incubated at 50°C for 20 min to kill other non-spore forming bacteria and then maintained in the dark at 4°C. Within 48 h of the experiment, aliquots of each sample were spread-plated in triplicate (all pre-EC treatment samples were diluted 1:10,000) onto tryptic soy agar and incubated at 36.5 \pm 1°C for 24 h. The resulting viable *B. subtilis* colonies (i.e. opaque in color and rough appearance) were enumerated and concentrations were back-calculated to account for dilutions. Since the maximum sample volume plated was 500 μl , the pLOD was 2 cfu/ml. No colonies grew on method blanks. While no colonies were present in the process control for the experiments with raw wastewater, the average *B. subtilis* concentration in the process control for the experiment with the tertiary treated wastewater was 39 cfu/ml.

MS2 bacteriophage. Since the wastewater samples were augmented with an MS2 bacteriophage culture prior to EC treatment, MS2 bacteriophage concentrations were quantified using the single-agar layer (SAL) protocol using *E. coli* Famp ATCC-700891TM for post-EC treatment samples and the double-agar layer (DAL) protocol for pre-EC treatment samples that had been diluted four-fold⁴⁹. Per US EPA method 1602, each pre-EC treatment sample was analyzed using the DAL protocol in triplicate and each post-EC treatment sample was analyzed in replicates of ten using the SAL protocol. All method blanks were negative. The pLOD was 1 plaque forming unit (pfu)/10 ml for the SAL protocol and 2,000 pfu/ml for the DAL protocol. The average concentrations of MS2 bacteriophage in the process controls were less than the pLOD.

Personal care products. Four raw and four tertiary treated wastewater samples as well as two process controls were analyzed before and after EC treatment by Test America (a NELAP accredited laboratory; Sacramento, CA, USA) following US EPA method 1694 for the following PCPs (with pLOD for all samples except the raw wastewater prior to EC treatment indicated in parentheses): acetaminophen (20 ng/L), caffeine (51 ng/L), carbamazepine (10 ng/L), DEET (25 ng/L), gemfibrozil (25 ng/L), primidone (250 ng/L), salicylic acid (50 ng/L), thiabendazole (10 ng/L),



triclocarban (10 ng/L), triclosan (50 ng/L), warfarin (20 ng/L), ibuprofen (25 ng/L), iopromide (50 ng/L), meprobamate (10 ng/L), naproxen (50 ng/L), phenytoin (100 ng/L), sulfamethoxazole (10 ng/L), and trimethoprim (10 ng/L)²¹. For the analysis of raw wastewater prior to EC treatment, the LOD was an order of magnitude greater for all analytes.

No PCPs were detected in the two process controls collected during the experiment with tertiary-treated wastewater. However, low concentrations of acetaminophen (22 ng/L), caffeine (83 ng/L), DEET (180 ng/L), and salicylic acid (76 ng/L) were detected in the process controls collected during the experiment with raw wastewater. Since the detected concentrations of these analytes in the process controls are less than the standard deviations observed for raw wastewater samples before and after EC treatment, it is unlikely that the observed contamination influenced the results of this study.

Statistical analyses. Statistical analyses were executed in SAS v.9.3 (SAS Institute Inc.; Cary, NC, USA) to identify significant ($\alpha = 0.05$) differences in the concentrations of all nutrients, microbes, and PCPs before and after EC treatment. If the data had normal distributions, a two-tailed t-test was performed with either the pooled method (for equal variances) or the Satterthwaite approximation (for unequal variances). If the data were not normally distributed, then the non-parametric Wilcoxon Rank Sum test was performed. For a given analyte, if a significant difference in pre- and post-EC treatment concentrations was determined with 95% confidence, then the average percent reduction was calculated. If concentrations were +BLOQ or <LOD, then the pLOQ or pLOD, respectively, were used to conservatively test for statistical differences and to calculate the average percent reduction.

- Nwachuku, N. & Gerba, C. P. Emerging waterborne pathogens: Can we kill them all? *Curr Opin Biotechnol* **15**, 175–180 (2004).
- Petrović, M., Gonzalez, S. & Barceló, D. Analysis and removal of emerging contaminants in wastewater and drinking water. *Trends Anal Chem* **22**, 685–696 (2003).
- Ashbolt, N., Grawbow, W. O. K. & Snozzi, M. in *Water quality guidelines, standards and health: Assessment of risk and risk assessment for water-related infectious disease* (ed World Health Organization) Ch. 13, 289–316 (IWA Publishing, 2001).
- Brausch, J. M. & Rand, G. M. A review of personal care products in the aquatic environment: environmental concentrations and toxicity. *Chemosphere* **82**, 1518–1532 (2011).
- Touraud, E., Roig, B., Sumpter, J. P. & Coetsier, C. Drug residues and endocrine disruptors in drinking water: risk for humans? *Int J Hyg Environ Health* **214**, 437–441 (2011).
- Jones, O. A. H., Voulvoulis, N. & Lester, J. N. Human pharmaceuticals in wastewater treatment processes. *Crit Rev Environ Sci Technol* **35**, 401–427 (2005).
- Mollah, M. Y. A. *et al.* Fundamentals, present and future perspectives of electrocoagulation. *J Hazard Mater* **114**, 199–210 (2004).
- Emamjomeh, M. M. & Sivakumar, M. Review of pollutants removed by electrocoagulation and electrocoagulation/floatation processes. *J Environ Manag* **90**, 1663–1679 (2009).
- Guohua, C. Electrochemical technologies in wastewater treatment. *Sep Purif Technol* **38**, 11–41 (2004).
- Mollah, M. Y. A., Schennach, R., Parga, J. R. & Cocke, D. L. Electrocoagulation (EC) — science and applications. *J Hazard Mater* **84**, 29–41 (2001).
- Holt, P. K., Barton, G. W. & Mitchell, C. A. The future for electrocoagulation as a localised water treatment technology. *Chemosphere* **59**, 355–367 (2005).
- Gheraout, D. & Gheraout, B. From chemical disinfection to electrodisinfection: The obligatory itinerary? *Desalin Water Treat* **16**, 156–175 (2010).
- Vik, E. A., Carlson, D. A., Eikum, A. S. & Gjessing, E. T. Electrocoagulation of potable water. *Water Res* **18**, 1355–1360 (1984).
- Zhu, B., Clifford, D. A. & Chellam, S. Comparison of electrocoagulation and chemical coagulation pretreatment for enhanced virus removal using microfiltration membranes. *Water Res* **39**, 3098–3108 (2005).
- Tanneru, C. T. & Chellam, S. Mechanisms of virus control during iron electrocoagulation – Microfiltration of surface water. *Water Res* **46**, 2111–2120 (2012).
- Gao, S. *et al.* Electro-coagulation–floatation process for algae removal. *J Hazard Mater* **177**, 336–343 (2010).
- Gheraout, D., Badis, A., Kellil, A. & Gheraout, B. Application of electrocoagulation in *Escherichia coli* culture and two surface waters. *Desalination* **219**, 118–125 (2008).
- Ouassa, Y. A., Chabani, M., Amrane, A. & Bensmaili, A. Removal of tetracycline by electrocoagulation: Kinetic and isotherm modeling through adsorption. *J Environ Chem Eng* **2**, 177–184 (2014).
- Koby, M., Can, O. T. & Bayramoglu, M. Treatment of textile wastewaters by electrocoagulation using iron and aluminum electrodes. *J Hazard Mater* **100**, 163–178 (2003).
- Chen, X., Chen, G. & Yue, P. L. Separation of pollutants from restaurant wastewater by electrocoagulation. *Sep Purif Technol* **19**, 65–76 (2000).
- Giçli, D. Optimization of electrocoagulation of pistachio processing wastewaters using the response surface methodology. *Desalin Water Treat*, 1–10, doi:10.1080/19443994.2014.907752 (2014).
- Cotillas, S., Llanos, J., Cañizares, P., Mateo, S. & Rodrigo, M. A. Optimization of an integrated electrodisinfection/electrocoagulation process with Al bipolar electrodes for urban wastewater reclamation. *Water Res* **47**, 1741–1750 (2013).
- Cotillas, S. *et al.* Coupling UV irradiation and electrocoagulation for reclamation of urban wastewater. *Electrochim Acta* **140**, 396–403 (2014).
- Pouet, M.-F. & Grasmick, A. Urban wastewater treatment by electrocoagulation and floatation. *Water Sci Technol* **31**, 275–283 (1995).
- Llanos, J., Cotillas, S., Cañizares, P. & Rodrigo, M. A. Effect of bipolar electrode material on the reclamation of urban wastewater by an integrated electrodisinfection/electrocoagulation process. *Water Res* **53**, 329–338 (2014).
- Thirugnanasambandham, K., Sivakumar, V. & Prakash Maran, J. Performance evaluation and optimization of electrocoagulation process to treat grey wastewater. *Desalin Water Treat*, 1–9, doi:10.1080/19443994.2014.927793 (2014).
- Kurt, U., Gonullu, M. T., Ilhan, F. & Varinca, K. Treatment of domestic wastewater by electrocoagulation in a cell with Fe-Fe electrodes. *Environ Eng Sci* **25**, 153–161 (2008).
- Ozyonar, F. & Karagozoglu, B. Operating cost analysis and treatment of domestic wastewater by electrocoagulation using aluminum electrodes. *Pol. J. Environ. Stud* **20**, 173 (2011).
- Nguyen, D. D., Ngo, H. H. & Yoon, Y. S. A new hybrid treatment system of bioreactors and electrocoagulation for superior removal of organic and nutrient pollutants from municipal wastewater. *Bioresour Technol* **153**, 116–125 (2014).
- Gheraout, D., Gheraout, B. & Naceur, M. W. Embodying the chemical water treatment in the green chemistry—A review. *Desalination* **271**, 1–10 (2011).
- U.S. Environmental Protection Agency. Method 1694: Pharmaceuticals and personal care products in water, soil, sediment, and biosolids by HPLC/MS/MS. (Publication No. EPA/821/R-08/002, Office of Water, Washington, D.C., 2007).
- Lacasa, E., Cañizares, P., Sáez, C., Fernández, F. J. & Rodrigo, M. A. Electrochemical phosphates removal using iron and aluminium electrodes. *Chem Eng J* **172**, 137–143 (2011).
- Lacasa, E., Cañizares, P., Sáez, C., Fernández, F. J. & Rodrigo, M. A. Removal of nitrates from groundwater by electrocoagulation. *Chem Eng J* **171**, 1012–1017 (2011).
- Malakootian, M., Yousefi, N. & Fatehizadeh, A. Survey efficiency of electrocoagulation on nitrate removal from aqueous solution. *Int J Environ Sci Technol* **8**, 107–114 (2011).
- Rosario, K., Symonds, E. M., Sinigalliano, C., Stewart, J. & Breitbart, M. Pepper mild mottle virus as an indicator of fecal pollution. *Appl Environ Microbiol* **75**, 7261–7267 (2009).
- McQuaig, S. M., Scott, T. M., Lukasik, J. O., Paul, J. H. & Harwood, V. J. Quantification of human polyomaviruses JC virus and BK virus by TaqMan quantitative PCR and comparison to other water quality indicators in water and fecal samples. *Appl Environ Microbiol* **75**, 3379–3388 (2009).
- Kitajima, M., Iker, B. C., Pepper, I. L. & Gerba, C. P. Relative abundance and treatment reduction of viruses during wastewater treatment processes — Identification of potential viral indicators. *Sci Total Environ* **488–489**, 290–296 (2014).
- Kuroda, K. *et al.* Pepper mild mottle virus as an indicator and a tracer of fecal pollution in water environments: Comparative evaluation with wastewater-tracer pharmaceuticals in Hanoi, Vietnam. *Sci Total Environ* **506–507**, 287–298 (2015).
- U.S. Environmental Protection Agency. Method 1600: Enterococci in water by membrane filtration using membrane-enterococcus indoxyl- β -D-glucoside agar (mEI). (Publication No. EPA-821-R-02-022, Office of Water, Washington, D.C., 2009).
- U.S. Environmental Protection Agency. Method 1602: Male-specific (F+) and somatic coliphage in water by single agar layer (SAL) procedure. (Publication No. EPA 821-R-01-029, Office of Research and Development, Washington, D.C., 2001).
- Samaras, V. G., Stasinakis, A. S., Mamais, D., Thomaidis, N. S. & Lekkas, T. D. Fate of selected pharmaceuticals and synthetic endocrine disrupting compounds during wastewater treatment and sludge anaerobic digestion. *J Hazard Mater* **244**, 259–267 (2013).
- Cañizares, P., Jiménez, C., Martínez, F., Sáez, C. & Rodrigo, M. A. Study of the electrocoagulation process using aluminum and iron electrodes. *Ind. Eng. Chem. Res.* **46**, 6189–6195 (2007).
- Mook, W. T., Aroua, M. K. & Issabayeva, G. Prospective applications of renewable energy based electrochemical systems in wastewater treatment: A review. *Renew Sust Energy Rev* **38**, 36–46 (2014).
- Gordon, L. I., Jennings Jr., J. C., Ross, A. A. & Krest, J. M. A Suggested Protocol For Continuous Flow Automated Analysis of Seawater Nutrients, WOCE Operation Manual, WHP Office Rept 90-1, WOCE Rept 77 No 68/91. 1–52 (2000).
- Symonds, E. M., Griffin, D. W. & Breitbart, M. Eukaryotic viruses in wastewater samples from the United States. *Appl Environ Microbiol* **75**, 1402–1409 (2009).
- Bustin, S. A. *et al.* The MIQE guidelines: Minimum information for publication of quantitative real-time PCR experiments. *Clin Chem* **55**, 611–622 (2009).
- American Public Health Association, American Water Works Association, Water Pollution Control Federation & Water Environment Federation in *Standard methods for the examination of water and wastewater*, 20th edn, Vol. 2 9.137–9.141 (American Public Health Association, 1998).



48. U.S. Environmental Protection Agency. Method 1611: Enterococci in water by Taqman® quantitative polymerase chain reaction (qPCR) assay. (Publication No. EPA-821-R-12-008, Office of Water, Washington, D.C., 2012).

Acknowledgments

The supplies for this research were funded by Powell Water Systems, Inc. (Centennial, CO, USA). E.M.S. was funded by the STAR Fellowship Assistance Agreement No. FP-91737601-3 awarded by the U.S. Environmental Protection Agency (EPA). This work has not been formally reviewed by the U.S. EPA; therefore, the views expressed in this paper are solely those of the authors and any mention of products does not constitute recommendation for use. Special thanks to Albert McAfee and the South Cross Bayou Water Reclamation facility for their cooperation in providing domestic wastewater. These experiments could not have been executed without the assistance of Bert Gerber (Gerber Pumps International, Inc.), Elizabeth Fahsbender (USF), Rachel Harbeitner (USF), Stephanie Lawler (USF), Bethany Levenson (USF), and Karyna Rosario (USF).

Author contributions

This study was designed by E.M.S., M.M.C., E.S.V.V. and M.B., with assistance from J.O.L. E.M.S., M.M.C., S.M.M., R.M.U. and R.O.S. executed the experiments with input from J.O.L. Microbial analyses were executed by R.O.S. (MS2 bacteriophage), S.M.M. (fecal indicator bacteria, *B. subtilis* spores, and HPyV), R.M.U. (fecal indicator bacteria), and E.M.S. (*B. subtilis* spores and PMMoV). The *B. subtilis* spores were provided by J.O.L. Statistical analyses were executed by E.M.S., with assistance from M.M.C. The manuscript

text as well as tables and figures were written and prepared by E.M.S., with subject relevant contributions from all authors. All authors reviewed the manuscript.

Additional information

Supplementary information accompanies this paper at <http://www.nature.com/scientificreports>

Competing financial interests: All authors wish to disclose the following facts, which may be considered as potential conflicts of interest given the financial contribution to this work. While this study was funded by Powell Water Systems, Inc., the funders had no role in the study design, sample collection and analyses, decision to publish, or the preparation of the manuscript. All authors confirm that they have no known conflicts of interest associated with the publication of this manuscript and that the financial support received did not influence the outcome of this study. The authors declare no competing financial interests.

How to cite this article: Symonds, E.M. *et al.* Reduction of nutrients, microbes, and personal care products in domestic wastewater by a benchtop electrocoagulation unit. *Sci. Rep.* **5**, 9380; DOI:10.1038/srep09380 (2015).



This work is licensed under a Creative Commons Attribution 4.0 International License. The images or other third party material in this article are included in the article's Creative Commons license, unless indicated otherwise in the credit line; if the material is not included under the Creative Commons license, users will need to obtain permission from the license holder in order to reproduce the material. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>