

# Maximizing single-pass conversion does not result in practical readiness for CO<sub>2</sub> reduction electrolyzers

Shashwati C. da Cunha &amp; Joaquin Resasco

Check for updates

For many chemical processes, high single-pass conversion of reactants into products reduces the need to separate products downstream. However, low-temperature carbon dioxide electrolyzers that maximize single-pass conversion suffer from low product concentration. Maximizing product concentration is therefore a more meaningful target for CO<sub>2</sub> electrolyzers than maximizing single-pass conversion.

To integrate electrochemical carbon dioxide reduction (CO<sub>2</sub>R) into the chemicals industry at scale, the outlet streams from CO<sub>2</sub> electrolyzers must be product rich. Single-pass conversion is becoming increasingly common as a performance benchmark for CO<sub>2</sub> electrolyzers because it suggests concentrated products and reduced separation energy for many catalytic processes. However, our analysis shows that CO<sub>2</sub>R reactor configurations that maximize single-pass conversion currently suffer from low product concentration in the outlet stream. This is because they restrict CO<sub>2</sub> flow or operate in acidic cathode environments, which promote considerable hydrogen evolution as a side reaction. For any gas products besides syngas, high single-pass conversion does not signify that separation energy losses have been eliminated, or that product streams are directly suitable as feedstocks for downstream processes. We therefore recommend that researchers targeting CO<sub>2</sub>R scaleup report product concentrations rather than relying on single-pass conversion as an indicator of overall performance. To commercialize CO<sub>2</sub> electrolysis, maximizing product concentration is a more relevant goal than maximizing single-pass conversion.

## Outlet streams from CO<sub>2</sub> electrolyzers need gas separations

Electrochemical CO<sub>2</sub> reduction is a potential low-carbon pathway for producing chemical feedstocks and fuels from renewable electricity, water, and CO<sub>2</sub><sup>1,2</sup>. CO<sub>2</sub> electrolyzers can produce value-added chemicals whose industrial demand is in the hundreds of megatons annually<sup>3,4</sup>, including carbon monoxide<sup>5</sup>, formic acid<sup>6</sup>, and ethylene<sup>7</sup>. CO can in turn be electrochemically reduced in a two-stage cascade<sup>8,9</sup>.

State-of-the-art CO<sub>2</sub> electrolyzers have limited reactant utilization because of the incomplete reaction of CO<sub>2</sub>, as well as CO<sub>2</sub> crossover due to carbonate acid-base equilibrium. Selectivity is also limited by competition from water reduction via the hydrogen evolution reaction (HER), in which CO<sub>2</sub> is uninvolved. Gas separations and recycle streams are needed to recover and convert unreacted CO<sub>2</sub>, and to purify products.


Typical CO<sub>2</sub> electrolyzers produce two gas-phase outlet streams, one each at the cathode and anode, which can both contain residual CO<sub>2</sub> (Fig. 1a). The cathode gas contains gas-phase CO<sub>2</sub>R products, unreacted CO<sub>2</sub>, and hydrogen as a byproduct from the HER. CO<sub>2</sub> electrolyzers can produce carbon monoxide with 100% molar selectivity<sup>10,11</sup>, so a hydrogen-free tail gas can be produced under optimal conditions. For multicarbon products, state-of-the-art electrolyzers have a molar selectivity of 50% to C<sub>2+</sub> products, with the co-evolution of 20% H<sub>2</sub> and 30% C<sub>1</sub> products at the cathode<sup>12,13</sup>. The scope of this discussion is limited to gas-phase separations, which are necessary for the production of CO or of ethylene, the dominant C<sub>2+</sub> product. For liquid products like formic acid, ethanol, and acetate, both gas and liquid product streams are formed, which requires an independent analysis of separations.

At the anode, oxygen is produced from water oxidation via the oxygen evolution reaction (OER). The anode outlet also contains CO<sub>2</sub> that crosses over the membrane via the homogeneous reactions shown in Fig. 1a<sup>14,15</sup>. This crossover arises from acid-base equilibria—hydroxide generated by the cathodic reaction converts dissolved CO<sub>2</sub> into (bi)carbonate ions in neutral electrolytes, like KHCO<sub>3</sub> or Cs<sub>2</sub>CO<sub>3</sub>, or alkaline electrolytes such as KOH. (Bi)carbonate anions migrate towards the anode, where they buffer protons generated by OER, regenerating CO<sub>2</sub> gas. This buffering reaction limits single-pass conversion at most pH<sup>16</sup>. In neutral electrolytes, carbonate ion crossover stoichiometrically consumes 0.5 mol CO<sub>2</sub>/mol e<sup>-</sup>, which results in an anode tail gas consisting of 67 mol% CO<sub>2</sub> + 33 mol% O<sub>2</sub>. Therefore, both the cathode and anode outlet gases can contain unreacted CO<sub>2</sub> that must be captured and recycled to the cathode (Fig. 1b, c).

Recycling unreacted CO<sub>2</sub> requires a gas separation that could be a capital- and energy-intensive process. An electrolyzer with incomplete conversion, imperfect selectivity, and reactant crossover needs at least three pairwise separations: one to separate the target product from byproducts, and two to recycle CO<sub>2</sub> from the cathode and anode outlets (Fig. 1d). Separation units are typically modeled as pressure-swing adsorption using electrical utilities<sup>3</sup>, but cryogenic distillation or amine scrubbing could be preferable depending on process scale, stream compositions, and available utilities<sup>17</sup>. If extensive downstream separations are required to purify products and recycle CO<sub>2</sub>, the overall energy efficiency of CO<sub>2</sub>R has been argued to suffer unacceptably<sup>15</sup>. To account for separation demands, studies on CO<sub>2</sub> electrolyzers increasingly report single-pass conversion (SPC):

$$\text{SPC} = \frac{\text{CO}_2 \text{ moles converted to products}}{\text{CO}_2 \text{ moles fed to reactor}}$$

In other catalytic processes, high SPC generally suggests improved reactant utilization and hence lower energy to recycle the unreacted

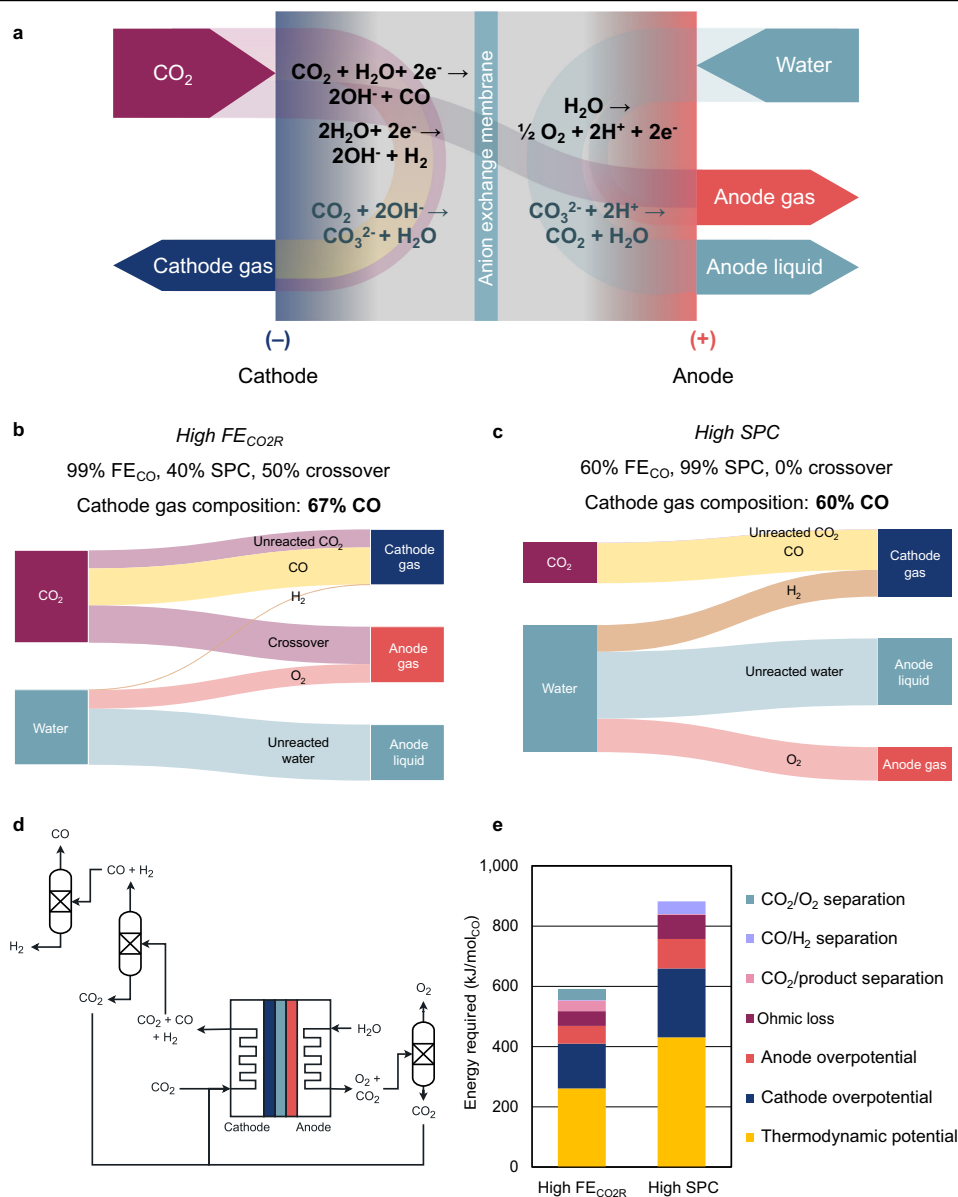

**Fig. 1 | Typical CO<sub>2</sub> electrolyzer outlet gases.** **a** Reaction pathways for a typical CO<sub>2</sub> electrolyzer reducing CO<sub>2</sub> to CO in a neutral electrolyte with an anion exchange membrane. Black text indicates heterogeneous redox reactions, while blue indicates homogeneous reactions. **b, c** Molar flow rates in a single pass of CO<sub>2</sub> reduction to CO for example scenarios with **(b)** high Faradaic efficiency towards CO<sub>2</sub>R with realistic parameters and **(c)** high single-pass conversion with optimistic

parameters. The total current is the same in both cases. Despite optimistically high single-pass conversion in **(c)**, CO concentration in the cathode outlet is decreased. **d** Sample gas separation scheme required for a CO<sub>2</sub> electrolyzer. **e** Energy required per mole of product for reaction (modeled as overpotential) versus separation (modeled thermodynamically) shows that the high-SPC scenario wastes reactor energy on hydrogen evolution. Process parameters correspond to **(b)** and **(c)**.


feed. Also, downstream applications, like ethylene polymerization, typically require high-purity feedstocks. Since high SPC implies that the products are not diluted in leftover reactant, it is associated with marketable product streams.

## High SPC does not eliminate cathode gas separations

Molar stream composition is a critical consideration for downstream applications. For instance, thermal reactors are sensitive to reactant partial pressures, so CO<sub>2</sub>R products must often be concentrated for

downstream processing. To assess the relationship between SPC and reactor outlet composition, we analyzed data from literature reports targeting state-of-the-art CO<sub>2</sub> electrolyzer performance (for details, see Supplementary Information, Section 3). These relationships are demonstrated in Fig. 2, with additional representations in Fig. S2 and pH dependence in Fig. S3.

As shown in Fig. 2a, we find that experimental conditions that maximize single-pass conversion do not correspond to concentrated product streams suitable for further reaction. To maximize SPC,

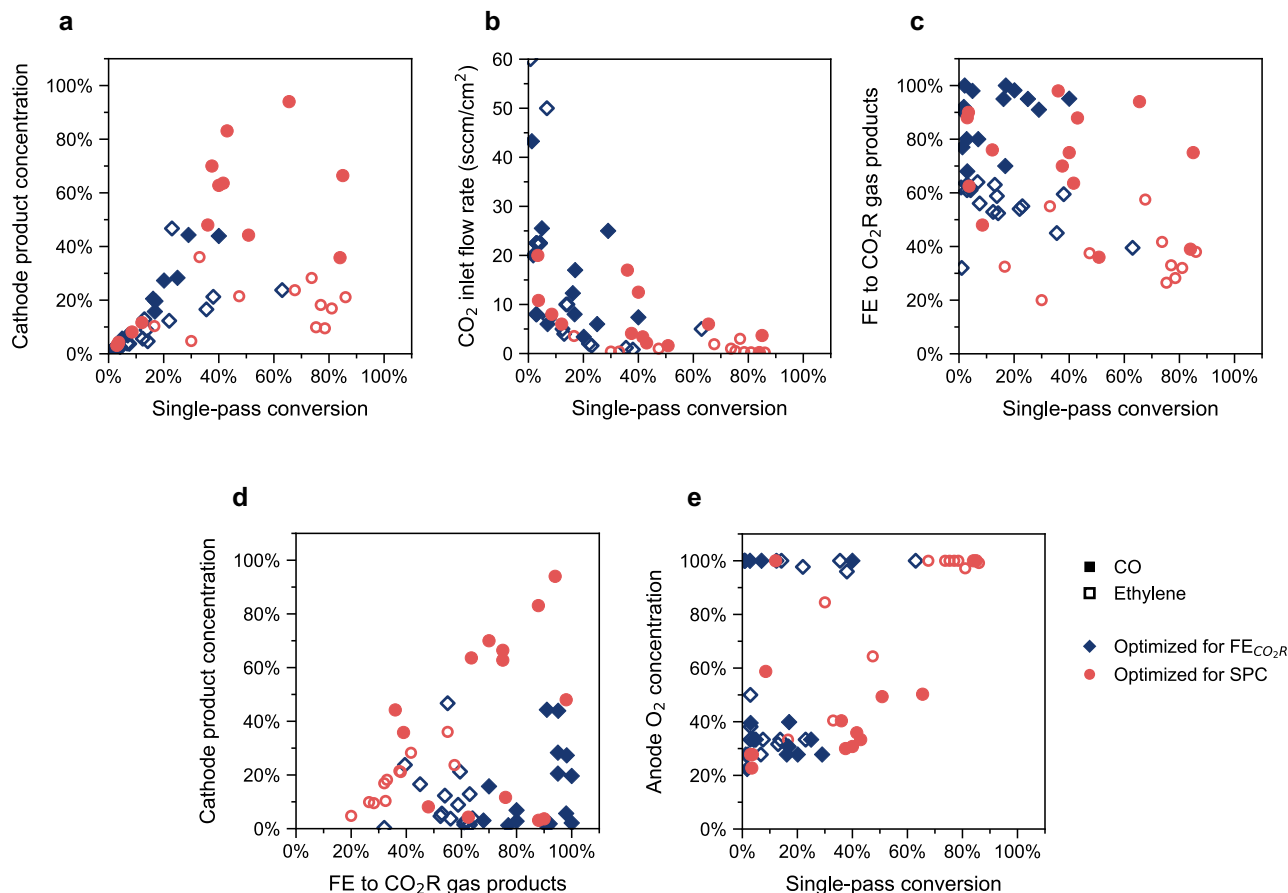

**Fig. 2 | Correlations between single-pass conversion and CO<sub>2</sub>R performance in literature.** **a** High single-pass conversion does not result in highly concentrated products that are suitable for downstream applications. **b** High single-pass conversion has been achieved at low feed flow rates, at which hydrogen evolution is the dominant reaction. **c** Faradaic efficiency to CO<sub>2</sub>R trades off with single-pass conversion across various reaction conditions. **d** Concentrated cathode streams are produced by maximizing Faradaic efficiency, which is extremely challenging at high

single-pass conversions. **e** Anode gas separations can be minimized across a range of single-pass conversion. Hollow symbols (□) correspond to ethylene production and filled symbols (■) represent CO generation. Red circles (●) correspond to the highest single-pass conversion in a report, and blue diamonds (◆) correspond to the highest FE<sub>CO<sub>2</sub>R</sub> in a report; their operating conditions are usually different since selectivity and SPC trade off in current electrolyzer configurations<sup>10,16,18–20,22,27,29–49</sup>.

studies are often conducted at low inlet CO<sub>2</sub> flow rates (Fig. 2b). Under these conditions, the partial pressure of CO<sub>2</sub> drops steeply across the reactor as it is consumed by reaction, resulting in a loss in CO<sub>2</sub>R selectivity in favor of HER<sup>18–20</sup>. In some cases, SPC has also been increased using an acidic electrolyte (e.g. H<sub>2</sub>SO<sub>4</sub> + K<sub>2</sub>SO<sub>4</sub>), or reverse-biased bipolar membrane to eliminate carbonate formation and crossover. Unfortunately, the high availability of protons in such configurations steers selectivity towards HER over CO<sub>2</sub>R, which is not captured in SPC since CO<sub>2</sub> plays no direct role in the HER reaction. This tradeoff between Faradaic efficiency (FE<sub>CO<sub>2</sub>R</sub>) and SPC has been demonstrated for various electrolyzers previously<sup>21–23</sup>, and is reflected across the dataset we analyzed (Fig. 2c). Hence strategies that reduce the need to recycle CO<sub>2</sub> still require separations to remove H<sub>2</sub> and concentrate the product for downstream processes. Additionally, electrolyzer energy is wasted on making H<sub>2</sub> in these scenarios. A comparison of the energy required for reaction and separation (Fig. 1e, Fig. S1) and a recent in-depth analysis<sup>24</sup> suggest that reactor energy requirements significantly exceed the energetic costs of separations.

Hence the energy demand for CO<sub>2</sub>R is dramatically increased at high SPC/ low FE<sub>CO<sub>2</sub>R</sub> conditions, even if gas separations are reduced (Fig. 1e). Therefore, high SPC neither eliminates the need for cathode gas separations, nor indicates that products are formed at an improved energy efficiency.

Neither SPC nor FE<sub>CO<sub>2</sub>R</sub> directly reflect outlet composition, as indicated by the lack of a clear trend in Fig. 2a, d. While SPC fails to account for HER, FE<sub>CO<sub>2</sub>R</sub> and partial current density do not reflect molar flow rates. For C<sub>2+</sub> products, this problem is especially acute since multiple electron pairs are transferred for CO<sub>2</sub>R, compared to a single pair to make H<sub>2</sub>. For example, a 90% FE to CO with 10% to H<sub>2</sub> at 100% SPC translates to a stream composition of 90 mol% CO + 10 mol% H<sub>2</sub>. In contrast, 90% FE to ethylene with 10% to H<sub>2</sub> results in 60 mol% ethylene + 40 mol% H<sub>2</sub> because of the 12 e<sup>-</sup> transferred to produce ethylene.

Although high FE<sub>CO<sub>2</sub>R</sub> does not perfectly scale to high molar flows, Fig. 2d shows that the most concentrated cathode product is obtained at high FE<sub>CO<sub>2</sub>R</sub>, which is extremely challenging to achieve at the low

flow rates that give high SPC. At high current densities and  $FE_{CO_2R}$ , high crossover and selective reaction manifest in very concentrated cathode products. On the other extreme, crossover can be minimized to produce 100%  $O_2$  at the anode. However, a pure  $O_2$  anode stream has been reported across a range of SPC (Fig. 2e), so high SPC is not a necessary condition for low crossover. If minimizing HER is important for  $CO_2R$  scaleup, then SPC to  $CO_2R$  products is a misleading metric that does not truly reflect that a reactor design is practical.

## Electrolyzers for scaleup should report outlet compositions

To pursue industrial relevance for selective  $CO_2R$ , we recommend a careful selection of metrics and operating conditions for measuring and reporting electrolyzer performance. Our analysis shows that SPC does not accurately reflect downstream compositions at the cathode. A realistic representation of separation demand can be provided by mole fractions and outlet flow rates. The concentration of products in the cathode and anode streams indicates the readiness of electrolyzers for downstream applications, informing separation energy and process feasibility. Therefore, we recommend that researchers report cathode and anode product stream compositions. Section 3 of the Supplementary Information outlines the conversions between more common metrics and stream compositions, which can also be used on existing datasets to analyze the effects of experimental variables on product streams.

We suggest that researchers characterize the composition of the anode gas, as has been recommended by Seger and coworkers<sup>25,26</sup>. At present, very few reports on state-of-the-art  $CO_2$  electrolyzers explicitly quantify the anode gas stream. The combination of complete anode and cathode gas quantification allows the carbon mass balance to be used as an additional experimental validation step. The carbon balance is especially important in alkaline electrolytes that absorb  $CO_2$ , where anode gas quantification can be nuanced.  $CO_2R$  reports in alkaline conditions rarely assess the extent of carbonate formation<sup>27</sup> or  $CO_2$  regeneration at the anode, and often report a lower crossover than is physically reasonable. This may be due to the anolyte not being purged of  $CO_2$ , thus excluding carbonate formation from the carbon balance.

We recommend that researchers supply  $CO_2$  flow rates that correspond to at least the amount of  $CO_2$  consumed stoichiometrically by  $CO_2R$  at the applied current. Many reports feed a lower  $CO_2$  molar flow than the chronopotentiometry current. This artificially inflates SPC at the cost of selectivity, since the  $CO_2R$  partial current density is severely reactant limited and HER must compensate for the remaining current. The complete reaction of 1 sccm of  $CO_2$  accounts for 143 mA of current through a  $2-e^-$  pathway making  $C_1$  products, or 430 mA of current through a  $12-e^-$   $C_2$  pathway. Therefore, on a  $5\text{ cm}^2$  cathode where 1 sccm  $CO_2$  is fed, it is impossible to produce more than 29 mA/cm<sup>2</sup> of  $C_1$  products, even in the absence of crossover. In a neutral electrolyte where carbonate is the dominant charge carrier,  $CO_2R$  current is further constrained by the crossover of 0.5 mol  $CO_2$ /mol  $e^-$ . Under these conditions, the partial current density to  $12-e^-$   $C_{2+}$  products from 1 sccm  $CO_2$  on a  $5\text{ cm}^2$  electrode is at most 22 mA/cm<sup>2</sup>. Most experiments in membrane electrode assemblies (MEAs) are operated at  $>50\text{ mA/cm}^2$ , so low  $CO_2$  flow rates guarantee high HER. To operate at a current density of 100 mA/cm<sup>2</sup> of  $CO_2R$  to CO on a  $5\text{ cm}^2$  electrode in neutral conditions, at least 7 sccm of  $CO_2$  must be fed to the reactor.

From a scaleup perspective, the optimal flowrate depends on complex tradeoffs, including between electrolyzer energy and

separator capital cost, or selectivity versus crossover<sup>24</sup>.  $CO_2R$  has been shown to be severely limited by  $CO_2$  availability in a variety of system configurations<sup>10,20,28</sup>. Continuum modeling of current electrolyzer designs suggests that concentration gradients on the cathode surface effectively make it impossible to co-optimize conversion and selectivity at low flow rates<sup>28</sup>. In contrast, large  $CO_2$  feeds steer selectivity towards  $CO_2R$  but increase separation and compression energies by diluting products and requiring recycle streams. Several reports<sup>19,20,22</sup> show a parabolic trend in product concentration versus feed flow rate. Further techno-economic analysis is needed to determine whether the process energy and cost are optimal at the peak of this parabola. We also note that industrial  $CO_2$  feeds differ from most reported experiments. Although our main conclusions are likely transferable, the scale of recycle streams and separation units for a dilute  $CO_2$  feed could change the optimum between separations and reactions.

Lastly, to clarify reports of high SPC, we recommend reporting  $FE_{CO_2R}$  and SPC at the same conditions, rather than the best-case scenarios for each. It has been repeatedly shown that selectivity and SPC trade off in current MEA designs<sup>23,29</sup>. A singlestar plot should not include the best performance of an electrolyzer under multiple operating conditions. Given the (bi)carbonate equilibrium, we also note that conversions should always be reported as the ratio of  $CO_2$  in  $CO_2R$  products/ $CO_2$  fed, and never  $CO_2$  consumed/ $CO_2$  fed.

In summary, we analyzed stream compositions for state-of-the-art  $CO_2$  electrolyzers to show that single-pass conversion alone does not capture the extent of downstream gas separations required. Although electrolyzers with high SPC do not dilute products in unreacted  $CO_2$ , they still produce mixed cathode product streams. In current electrolyzer designs, this tradeoff arises from physical limitations. Low  $CO_2$  feed flow rates and proton-rich environments maximize SPC but increase the side reaction of hydrogen evolution. We recommend that researchers prioritize and report outlet gas compositions, since maximizing product yield and mole fraction in the cathode outlet is more practically important than maximizing single-pass conversion. While reactor designs that decouple the tradeoff between selectivity and SPC could be pursued, electrolyzer energy dominates separation for both low and high SPC operation, so this is not the most pressing challenge facing  $CO_2R$  scaleup. Thermocatalytic processes and solid oxide electrolytic cells often operate at low SPC with separation and recycle schemes, optimizing systems for the reaction rather than separation.  $CO_2$  electrolyzers can similarly benefit from prioritizing other goals, including high product yields and low cell voltages, over increased single-pass conversion.

## Data availability

The source data from this study can be found in the Source Data file (Excel workbook). The workbook includes: literature data, assumptions and calculated metrics used to generate Fig. 2; additional figures comparing metrics; assumptions and analysis for the energy breakdown in Fig. 1e; calculations for limiting  $CO_2$  flow rates and current densities recommended in the main text. Figure 1a, b are discussed in the Supplementary Information, Section 1, and their source data is available from the authors upon reasonable request. The Supplementary Information details the assumptions made, including in Section 5 and Tables S1, S2. Source data are provided with this paper.

Shashwati C. da Cunha<sup>1</sup> & Joaquin Resasco<sup>1</sup> ✉

<sup>1</sup>McKetta Department of Chemical Engineering, The University of Texas at Austin, Austin, TX 78712, USA. ✉e-mail: [resasco@utexas.edu](mailto:resasco@utexas.edu)



Received: 29 May 2023; Accepted: 31 August 2023;  
Published online: 07 September 2023

## References

- Resasco, J. & Bell, A. T. Electrocatalytic CO<sub>2</sub> reduction to fuels: progress and opportunities. *Trends Chem.* **2**, 825–836 (2020).
- Nitopi, S. et al. Progress and perspectives of electrochemical CO<sub>2</sub> reduction on copper in aqueous electrolyte. *Chem. Rev.* **119**, 7610–7672 (2019).
- Jouny, M., Luc, W. & Jiao, F. General techno-economic analysis of CO<sub>2</sub> electrolysis systems. *Ind. Eng. Chem. Res.* **57**, 2165–2177 (2018).
- De Luna, P. et al. What would it take for renewably powered electrosynthesis to displace petrochemical processes? *Science* **364**, eaav3506 (2019).
- Kaczur, J. J., Yang, H., Liu, Z., Sajjad, S. D. & Masel, R. I. Carbon dioxide and water electrolysis using new alkaline stable anion membranes. *Front. Chem.* **6**, 263 (2018).
- Fernández-Caso, K., Diaz-Sainz, G., Alvarez-Guerra, M. & Irabien, A. Electroreduction of CO<sub>2</sub>: advances in the continuous production of formic acid and formate. *ACS Energy Lett.* **8**, 1992–2024 (2023).
- Edwards, J. P. et al. Pilot-scale CO<sub>2</sub> electrolysis enables a semi-empirical electrolyzer model. *ACS Energy Lett.* **8**, 2576–2584 (2023).
- Jouny, M., Hutchings, G. S. & Jiao, F. Carbon monoxide electroreduction as an emerging platform for carbon utilization. *Nat. Catal.* **2**, 1062–1070 (2019).
- Ripatti, D. S., Veltman, T. R. & Kanan, M. W. Carbon monoxide gas diffusion electrolysis that produces concentrated C<sub>2</sub> products with high single-pass conversion. *Joule* **3**, 240–256 (2019).
- Bhargava, S. S. et al. System design rules for intensifying the electrochemical reduction of CO<sub>2</sub> to CO on Ag nanoparticles. *ChemElectroChem* **7**, 2001–2011 (2020).
- Bondue, C. J., Graf, M., Goyal, A. & Koper, M. T. M. Suppression of hydrogen evolution in acidic electrolytes by electrochemical CO<sub>2</sub> reduction. *J. Am. Chem. Soc.* **143**, 279–285 (2021).
- García de Arquer, F. P. et al. CO<sub>2</sub> electrolysis to multicarbon products at activities greater than 1 A/cm<sup>2</sup>. *Science* **367**, 661–666 (2020).
- Dinh, C.-T. et al. CO<sub>2</sub> electroreduction to ethylene via hydroxide-mediated copper catalysis at an abrupt interface. *Science* **360**, 783–787 (2018).
- Rabinowitz, J. A. & Kanan, M. W. The future of low-temperature carbon dioxide electrolysis depends on solving one basic problem. *Nat. Commun.* **11**, 5231 (2020).
- Ozden, A. et al. Carbon-efficient carbon dioxide electrolyzers. *Nat. Sustain.* **5**, 563–573 (2022).
- Ma, M. et al. Insights into the carbon balance for CO<sub>2</sub> electroreduction on Cu using gas diffusion electrode reactor designs. *Energy Environ. Sci.* **13**, 977–985 (2020).
- Alerte, T. et al. Downstream of the CO<sub>2</sub> electrolyzer: assessing the energy intensity of product separation. *ACS Energy Lett.* **6**, 4405–4412 (2021).
- Xie, Y. et al. High carbon utilization in CO<sub>2</sub> reduction to multi-carbon products in acidic media. *Nat. Catal.* **5**, 564–570 (2022).
- O'Brien, C. P. et al. Single pass CO<sub>2</sub> conversion exceeding 85% in the electrosynthesis of multicarbon products via local CO<sub>2</sub> regeneration. *ACS Energy Lett.* **6**, 2952–2959 (2021).
- Pan, B. et al. Close to 90% single-pass conversion efficiency for CO<sub>2</sub> electroreduction in an acid-fed membrane electrode assembly. *ACS Energy Lett.* **7**, 4224–4231 (2022).
- Shin, H., Hansen, K. U. & Jiao, F. Techno-economic assessment of low-temperature carbon dioxide electrolysis. *Nat. Sustain.* **4**, 911–919 (2021).
- Jeng, E. & Jiao, F. Investigation of CO<sub>2</sub> single-pass conversion in a flow electrolyzer. *React. Chem. Eng.* **5**, 1768–1775 (2020).
- Hawks, S. A. et al. Analyzing production rate and carbon utilization trade-offs in CO<sub>2</sub>RR electrolyzers. *ACS Energy Lett.* **7**, 2685–2693 (2022).
- Moore, T. et al. Electrolyzer energy dominates separation costs in state-of-the-art CO<sub>2</sub> electrolyzers: Implications for single-pass CO<sub>2</sub> utilization. *Joule* **7**, 782–796 (2023).
- Seger, B., Robert, M. & Jiao, F. Best practices for electrochemical reduction of carbon dioxide. *Nat. Sustain.* **6**, 236–238 (2023).
- Larrazábal, G. O., Ma, M. & Seger, B. A comprehensive approach to investigate CO<sub>2</sub> reduction electrocatalysts at high current densities. *Acc. Mater. Res.* **2**, 220–229 (2021).
- Mardle, P., Cassegrain, S., Habibzadeh, F., Shi, Z. & Holdcroft, S. Carbonate ion crossover in zero-gap, KOH anolyte CO<sub>2</sub> electrolysis. *J. Phys. Chem. C* **125**, 25446–25454 (2021).
- Kas, R. et al. Along the channel gradients impact on the spatioactivity of gas diffusion electrodes at high conversions during CO<sub>2</sub> electroreduction. *ACS Sustain. Chem. Eng.* **9**, 1286–1296 (2021).
- Subramanian, S., Middelkoop, J. & Burdyny, T. Spatial reactant distribution in CO<sub>2</sub> electrolysis: balancing CO<sub>2</sub> utilization and faradaic efficiency. *Sustain. Energy Fuels* **5**, 6040–6048 (2021).
- Edwards, J. P. et al. Efficient electrocatalytic conversion of carbon dioxide in a low-resistance pressurized alkaline electrolyzer. *Appl. Energy* **261**, 114305 (2020).
- Endrődi, B. et al. Multilayer electrolyzer stack converts carbon dioxide to gas products at high pressure with high efficiency. *ACS Energy Lett.* **4**, 1770–1777 (2019).
- Endrődi, B. et al. High carbonate ion conductance of a robust PiperION membrane allows industrial current density and conversion in a zero-gap carbon dioxide electrolyzer cell. *Energy Environ. Sci.* **13**, 4098–4105 (2020).
- Gu, J. et al. Modulating electric field distribution by alkali cations for CO<sub>2</sub> electroreduction in strongly acidic medium. *Nat. Catal.* **5**, 268–276 (2022).
- Larrazábal, G. O. et al. Analysis of mass flows and membrane cross-over in CO<sub>2</sub> reduction at high current densities in an MEA-type electrolyzer. *ACS Appl. Mater. Interfaces* **11**, 41281–41288 (2019).
- Li, H. et al. Tailoring acidic microenvironments for carbon-efficient CO<sub>2</sub> electrolysis over a Ni–N–C catalyst in a membrane electrode assembly electrolyzer. *Energy Environ. Sci.* **16**, 1502–1510 (2023).
- Liu, Z. et al. Acidic electrocatalytic CO<sub>2</sub> reduction using space-confined nanoreactors. *ACS Appl. Mater. Interfaces* **14**, 7900–7908 (2022).
- Liu, Z., Yang, H., Kutz, R. & Masel, R. I. CO<sub>2</sub> electrolysis to CO and O<sub>2</sub> at high selectivity, stability and efficiency using sustainion membranes. *J. Electrochem. Soc.* **165**, J3371–J3377 (2018).
- Verma, S. et al. Insights into the low overpotential electroreduction of CO<sub>2</sub> to CO on a supported gold catalyst in an alkaline flow electrolyzer. *ACS Energy Lett.* **3**, 193–198 (2018).
- Wheeler, D. G. et al. Quantification of water transport in a CO<sub>2</sub> electrolyzer. *Energy Environ. Sci.* **13**, 5126–5134 (2020).
- Yang, K. et al. Cation-driven increases of CO<sub>2</sub> utilization in a bipolar membrane electrode assembly for CO<sub>2</sub> electrolysis. *ACS Energy Lett.* **6**, 4291–4298 (2021).
- Gabardo, C. M. et al. Continuous carbon dioxide electroreduction to concentrated multicarbon products using a membrane electrode assembly. *Joule* **3**, 2777–2791 (2019).
- Huang, J. E. et al. CO<sub>2</sub> electrolysis to multicarbon products in strong acid. *Science* **372**, 1074–1078 (2021).
- Khan, M. A. et al. Zero-crossover electrochemical CO<sub>2</sub> reduction to ethylene with co-production of valuable chemicals. *Chem. Catal.* **2**, 2077–2095 (2022).
- Ozden, A. et al. Energy- and carbon-efficient CO<sub>2</sub>/CO electrolysis to multicarbon products via asymmetric ion migration–adsorption. *Nat. Energy* **8**, 179–190 (2023).
- Xie, K. et al. Bipolar membrane electrolyzers enable high single-pass CO<sub>2</sub> electroreduction to multicarbon products. *Nat. Commun.* **13**, 3609 (2022).
- Xu, Y. et al. A microchanneled solid electrolyte for carbon-efficient CO<sub>2</sub> electrolysis. *Joule* **6**, 1333–1343 (2022).
- Ma, M., Kim, S., Chorkendorff, I. & Seger, B. Role of ion-selective membranes in the carbon balance for CO<sub>2</sub> electroreduction via gas diffusion electrode reactor designs. *Chem. Sci.* **11**, 8854–8861 (2020).
- Corral, D. et al. Advanced manufacturing for electrosynthesis of fuels and chemicals from CO<sub>2</sub>. *Energy Environ. Sci.* **14**, 3064–3074 (2021).
- Zhao, Y. et al. Conversion of CO<sub>2</sub> to multicarbon products in strong acid by controlling the catalyst microenvironment. *Nat. Synth.* **2**, 403–412 (2023).

## Acknowledgements

J.R. gratefully acknowledges support from the Welch Foundation under Grant No. F-2076. The authors thank Christopher Hahn, Thomas Moore, Justin Bui, Alex King, Joel Graves, and Harrison Lippie for useful discussions.

## Author contributions

S.C.D. developed the concept, analyzed experimental data, and wrote the article. J.R. guided the work. All authors contributed to the discussion, review, and editing of the manuscript.

## Competing interests

The authors declare no competing interests.

## Additional information

**Supplementary information** The online version contains supplementary material available at <https://doi.org/10.1038/s41467-023-41348-w>.

**Correspondence** and requests for materials should be addressed to Joaquin Resasco.

**Peer review information** *Nature Communications* thanks Guillermo Díaz-Sainz and Damien Voiry for their contribution to the peer review of this work.

**Reprints and permissions information** is available at <http://www.nature.com/reprints>

**Publisher's note** Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

---

# Comment

---

**Open Access** This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons license, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons license and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this license, visit <http://creativecommons.org/licenses/by/4.0/>.

© The Author(s) 2023