



OPEN

Generalizations of incompressible and compressible Navier–Stokes equations to fractional time and multi-fractional space

M. Levent Kavvas¹ & Ali Ercan^{2,3}✉

This study develops the governing equations of unsteady multi-dimensional incompressible and compressible flow in fractional time and multi-fractional space. When their fractional powers in time and in multi-fractional space are specified to unit integer values, the developed fractional equations of continuity and momentum for incompressible and compressible fluid flow reduce to the classical Navier–Stokes equations. As such, these fractional governing equations for fluid flow may be interpreted as generalizations of the classical Navier–Stokes equations. The derived governing equations of fluid flow in fractional differentiation framework herein are nonlocal in time and space. Therefore, they can quantify the effects of initial and boundary conditions better than the classical Navier–Stokes equations. For the frictionless flow conditions, the corresponding fractional governing equations were also developed as a special case of the fractional governing equations of incompressible flow. When their derivative fractional powers are specified to unit integers, these equations are shown to reduce to the classical Euler equations. The numerical simulations are also performed to investigate the merits of the proposed fractional governing equations. It is shown that the developed equations are capable of simulating anomalous sub- and super-diffusion due to their nonlocal behavior in time and space.

The origin of fractional differentiation goes back to a letter between Leibniz and l'Hôpital in late seventeenth century. Later, Euler¹, Lagrange², Liouville³, Grünwald⁴, and Riemann⁵ made significant contributions to fractional calculus⁶. Until recently, fractional calculus has been considered as a mathematical theory without real-life applications. However, starting with the last quarter of twentieth century, the fractional differentiation found numerous applications in science, mainly due to its nonlocal nature (see the next section). Such applications are found in rheology, electrochemistry, chemical physics, finance, bioengineering, continuum mechanics, image and signal processing, plasma physics, diffusion and advection phenomena^{6–10}.

Navier Stokes equations (NSE) are the origin of the governing equations of flow and transport. Evidence of fractional flow and transport behavior in various fields of science was already reported, for example in hydrology and hydraulics^{11–15}, anomalous transport of solutes in porous media^{16–19}, and climate science^{20–23}. Recently, a number of models in applied mathematics was also reported based on fractional derivatives, for example, to model propagation of long waves by fractional Korteweg–de Vries equation^{24–26}, and to model diffusion by fractional Burgers' equation^{27,28}.

Expressing the conservation of mass and momentum, the NSE govern the motion of fluids in above mentioned subfields of science including flows and turbulence in the atmosphere, rivers, lakes and soil. Fractional flow and transport models showed superiority in describing anomalous diffusion^{9,29,30}, intermittent turbulence³¹, chaos-induced turbulence diffusion³², and multifractal behavior of velocity fields of turbulent fluids at low viscosity³³. As such, fractional Navier–Stokes equations have been generalized by researchers in the last decades by time fractional NSE (tfNSE) and/or space fractional NSE (sfNSE). Here, we generalize the governing equations of unsteady multi-dimensional incompressible and compressible NSE to fractional time and multi-fractional space. When the fractional powers in time and in multi-fractional space are unit integer values, the developed fractional

¹Hydrologic Research Laboratory and J. Amorocho Hydraulics Laboratory, Department of Civil and Environmental Engineering, University of California, Davis, CA 95616, USA. ²J. Amorocho Hydraulics Laboratory, Department of Civil and Environmental Engineering, University of California, Davis, CA 95616, USA. ³Now at Hydraulics Laboratory, Department of Civil Engineering, Middle East Technical University, Ankara, Turkey. ✉email: ercanali@metu.edu.tr

equations of continuity and momentum for incompressible and compressible fluid flow reduce to the classical NSE. The derived fractional governing equations are nonlocal in time and space. As such, they can quantify the effects of initial and boundary conditions better than the classical integer order NSE.

In general, tfNSE were simply obtained by replacing the time derivative in the moment equation with a fractional time derivative^{34–36} and sfNSE were obtained by replacing the Laplacian operator by a fractional Laplacian operator^{37,38}. Wu³⁹ studied the existence and uniqueness of solutions of sfNSE. Starting with sfNSE, Xu et al.³⁸ numerically investigated the pressure-driven flow between two parallel plates by the finite difference method. The tfNSE have been studied extensively by development of analytical solutions to special flow cases^{34–36} and numerical methods^{40,41}. Carvalho-Neto and Planas⁴² explored the existence, uniqueness, decay, and regularity properties of mild solutions to tfNSE and pointed out that the time fractional derivative has affected not only the regularity in the time variable of the solution but also that in the space variable. Zhou and Peng⁴³ studied the existence and uniqueness of global and local mild solutions of tfNSE. Replacing the time derivative in the moment equation with the fractional derivative in Caputo sense, El-Shahed and Salem³⁴ obtained exact solutions for three special configurations. Momani and Odibat³⁵ applied the Adomian decomposition method to solve the unsteady flow of a viscous fluid in a tube in which the velocity field is a function of one space coordinate. Kumar et al.³⁶ studied the same problem by coupling Adomian decomposition method and Laplace transform method. However, analytical solutions of tfNSE are only available under certain assumptions about the state of the fluid and for simple configurations for the flow pattern³⁵. Utilizing fractional integrals to consider the fractality of a homogeneous fractional flow medium (with a constant fractal dimension $D < 3$), the fractional generalization of Navier–Stokes and Euler equations were introduced by the seminal work of Tarasov⁴⁴, in which final forms of the fractional governing equations with space fractional derivatives but integer order time derivative were developed. As such, the scaling factors appear only for space fractional derivative terms in the fractional governing equations in Tarasov⁴⁴.

This study introduces dimensionally consistent governing equations for the motion of fluids in fractional time and multifractional space. Unlike most of the previously introduced fractional fluid flow equations, the proposed governing equations herein have scaling factors for both the fractional time and fractional space derivative terms, which also assure dimensional consistency. As explained in Zaslavsky³⁰, fractional governing equations account for the anomalous flow processes, including sub-diffusive (i.e., slow) and super-diffusive (i.e., fast) processes. Numerical simulations are performed in this study to show the importance of fractional time and space derivative powers and to investigate the anomalous behaviour in the fNSE.

Physical framework of the fractional derivative. The fractional derivative of order $0 < \alpha$ for a function $f(t)$ in Caputo framework is defined as follows⁸

$${}_a D_t^\alpha f(t) = \frac{1}{\Gamma(m-\alpha)} \int_a^t \frac{f^{(m)}(\tau) d\tau}{(t-\tau)^{\alpha+1-m}}, \quad 0 \leq m-1 < \alpha < m, \quad t \geq a \quad (1)$$

where $\Gamma(\cdot)$ is the gamma function, and $m = 1, 2, 3, \dots$. Accordingly, the fractional derivative of a function depends on its values over an entire interval $[a, t]$ and therefore can handle nonlocal effects. The fractional derivative definition in Eq. (1) can represent the fractional derivative with respect to time or space, depending on whether the variable t is defined as time or spatial location.

For $0 < \alpha \leq 1$, a first-order approximation of Caputo's fractional time derivative over a given time interval $[0, T]$, which is divided into N equal subintervals of increment $dt = T/N$ by using nodes $t_n = n \cdot dt$, $n = 0, 1, 2, \dots, N$, can be written as⁴⁵:

$$D_t^\alpha f^n = \frac{1}{\Gamma(2-\alpha)} \frac{1}{dt^\alpha} \sum_{j=1}^n w_j^{(\alpha)} (f^{n-j+1} - f^{n-j}) \quad (2)$$

where $f^n = f(t_n)$ and the weight $w_j^{(\alpha)} = j^{1-\alpha} - (j-1)^{1-\alpha}$.

As shown in Eq. (2), the fractional derivative of $f(t_N)$ is estimated from the difference between $f(t_N)$ and $f(t_{N-1})$, $f(t_{N-2})$, ..., $f(t_1)$, and $f(t_0)$ with weights $w_j^{(\alpha)}$ for $j = 1, 2, \dots, N$. The difference between $f(t_N)$ and $f(t_{N-1})$ contributes with $w_1^{(\alpha)}$, between $f(t_N)$ and $f(t_{N-2})$ contributes with $w_2^{(\alpha)}$, and so on (see Fig. 1a). For increasing j , weights decrease slower as α gets smaller, and weights decrease faster as α gets larger (see Fig. 1b). As such, function values away from t_N contribute to the fractional derivative of $f(t_N)$ with higher weights as fractional parameter α decreases from 1. In other words, the effect of past lessens for time fractional derivative and the effect of long distances reduces for space fractional derivative as fractional parameter goes to 1. Similarly, the effect of past for time fractional derivative and the effect of long distances for space fractional derivative grow as fractional parameter decreases from 1. By such a definition of the fractional derivative, a physical phenomenon taking long memory in time and long-range dependence in space can be realistically modeled. Time dependence not only at the time of interest but also at previous times can be modeled by time fractional governing equations. Similarly, long-range dependence in space can be modeled by space fractional governing equations, so that the space dependence not only at the location of interest but also at other spatial locations can be realistically modeled by space fractional governing equations. As such, the fractional governing equations can consider the effect of the initial conditions for long times, and the effect of the boundary conditions for long distances.

Continuity equation of unsteady fluid flow in fractional time and multifractional space. To β -order the Caputo fractional derivative ${}_a D_x^\beta f(x)$ of a function $f(x)$ may be defined as^{46–49}:

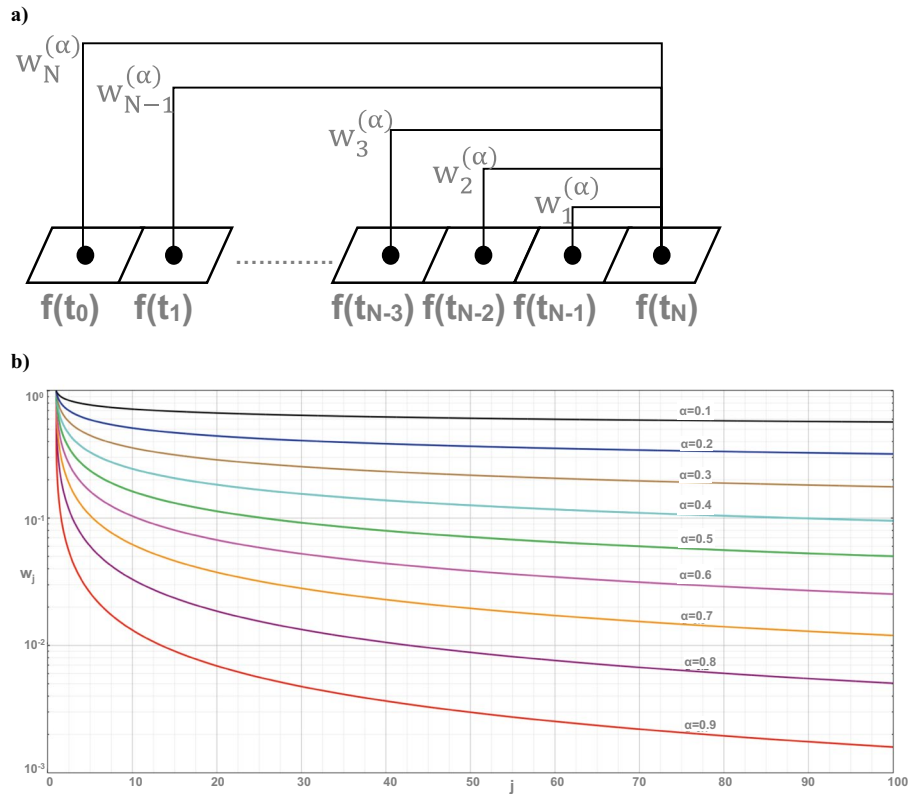


Figure 1. (a) Schematic description of weights $w_j^{(\alpha)}$ (for $j = 1, 2, \dots, N$) in estimating the fractional derivative $D_t^\alpha f(t_N)$ and (b) weights as a function of j .

$${}_a D_x^\beta f(x) = \frac{1}{\Gamma(1-\beta)} \int_a^x \frac{f'(\xi)}{(x-\xi)^\beta} d\xi, \quad 0 < \beta < 1, \quad x \geq a \tag{3}$$

where ξ represents a dummy variable in the equation.

It was shown that one can obtain a β_i -order ($i = 1, 2, 3$) approximation to a function $f(x_i)$ around $x_i - \Delta x_i$ as¹⁵:

$$f(x_i) = f(x_i - \Delta x_i) + \frac{(\Delta x_i)^{\beta_i}}{\Gamma(\beta_i + 1)} {}_{x_i - \Delta x_i} D_{x_i}^{\beta_i} f(x_i), \quad i = 1, 2, 3. \tag{4}$$

In Eq. (4), for $f(x_i) = x_i$ an analytical relationship between Δx_i and $(\Delta x_i)^\beta$ ($i = 1, 2, 3$) that will be applicable throughout the modelling domain is possible when the lower limit in the above Caputo derivative in Eq. (4) is taken as zero (that is, $\Delta x_i = x_i$)¹⁵.

Within the above framework one can express the net mass outflow rate from the control volume in Fig. 2 as:

$$[\rho u_1(x_1, x_2, x_3; t) - \rho u_1(x_1 - \Delta x_1, x_2, x_3; t)] \Delta x_2 \Delta x_3 + [\rho u_2(x_1, x_2, x_3; t) - \rho u_2(x_1, x_2 - \Delta x_2, x_3; t)] \Delta x_1 \Delta x_3 + [\rho u_3(x_1, x_2, x_3; t) - \rho u_3(x_1, x_2, x_3 - \Delta x_3; t)] \Delta x_1 \Delta x_2. \tag{5}$$

Then by introducing Eq. (4) into Eq. (5) with $\Delta x_j = x_j$, $j = 1, 2, 3$, and expressing the resulting Caputo derivative ${}_0 D_x^\beta f(x)$ (taking $\Delta x = x$ renders the lower limit in the Caputo derivative of Eq. (4) to be 0) by $\frac{\partial^\beta f(x)}{(\partial x)^\beta}$ for convenience, the net mass flux from the control volume in Fig. 2 may be expressed to β_i -order, $i = 1, 2, 3$ as:

$$\frac{(\Delta x_1)^{\beta_1}}{\Gamma(\beta_1 + 1)} \left(\frac{\partial}{\partial x_1} \right)^{\beta_1} (\rho u_1(\bar{x}; t)) \Delta x_2 \Delta x_3 + \frac{(\Delta x_2)^{\beta_2}}{\Gamma(\beta_2 + 1)} \left(\frac{\partial}{\partial x_2} \right)^{\beta_2} (\rho u_2(\bar{x}; t)) \Delta x_1 \Delta x_3 + \frac{(\Delta x_3)^{\beta_3}}{\Gamma(\beta_3 + 1)} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} (\rho u_3(\bar{x}; t)) \Delta x_1 \Delta x_2 \tag{6}$$

where $\bar{x} = (x_1, x_2, x_3)$, ρ is the fluid density and $u_i(\bar{x}; t)$ is the component of the flow velocity vector in x_i direction, $i = 1, 2, 3$.

It also follows from Eq. (4) with $f(x_i) = x_i$ that¹⁵

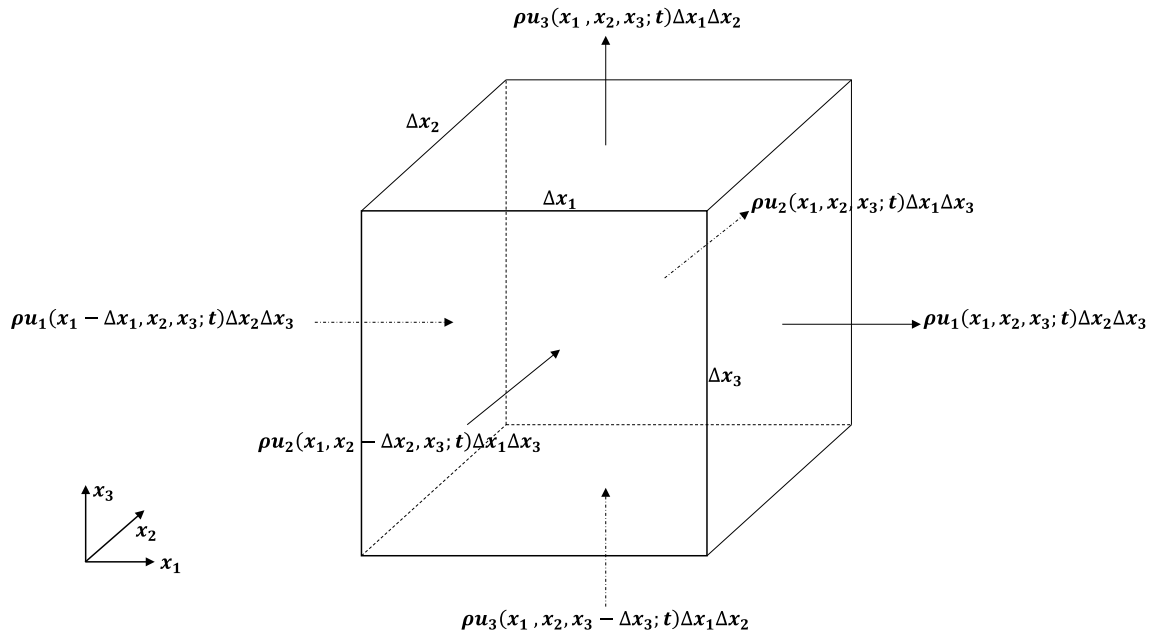


Figure 2. The control volume for the water flow in three-dimensional space.

$$(\Delta x_i)^{\beta_i} = \frac{\Gamma(\beta_i + 1)\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}}(\Delta x_i), \quad i = 1, 2, 3 \tag{7}$$

with respect to β_i -order fractional space in the i -th direction, $i = 1, 2, 3$.

Introducing Eq. (7) into Eq. (6) yields for the net mass outflow rate through the control volume

$$\begin{aligned} & \frac{\Gamma(2 - \beta_1)}{x_1^{1-\beta_1}} \left(\frac{\partial}{\partial x_1} \right)^{\beta_1} (\rho u_1(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3 + \frac{\Gamma(2 - \beta_2)}{x_2^{1-\beta_2}} \left(\frac{\partial}{\partial x_2} \right)^{\beta_2} (\rho u_2(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3 \\ & + \frac{\Gamma(2 - \beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} (\rho u_3(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3, \quad \bar{x} = (x_1, x_2, x_3) \end{aligned} \tag{8}$$

to β_i -order, $i = 1, 2, 3$.

The time rate of change of mass within the control volume in Fig. 2 may be expressed as

$$\frac{\rho(\bar{x}, t) - \rho(\bar{x}, t - \Delta t)}{\Delta t} \Delta x_1 \Delta x_2 \Delta x_3 \tag{9}$$

Introducing Eq. (4), with fractional power β_i replaced by α , and x replaced by t , into Eq. (9), and expressing the resulting Caputo derivative operator with its lower limit as 0, by $\frac{\partial^\alpha}{(\partial t)^\alpha}$ for convenience, yields the time rate of change of mass within the control volume with respect to α -fractional time increments:

$$\frac{(\Delta t)^\alpha}{\Delta t \Gamma(\alpha + 1)} \left(\frac{\partial}{\partial t} \right)^\alpha \rho(\bar{x}, t) \Delta x_1 \Delta x_2 \Delta x_3 \tag{10}$$

to α -order. With respect to the Caputo derivative ${}_0 D_t^\alpha t = \frac{\partial^\alpha t}{(\partial t)^\alpha}$:

$$\frac{\partial^\alpha t}{(\partial t)^\alpha} = \frac{t^{1-\alpha}}{\Gamma(2 - \alpha)} \tag{11}$$

which when combined with Eq. (4) (with x replaced by t and β_i replaced by α) yields the approximation

$$(\Delta t)^\alpha = \frac{\Gamma(\alpha + 1)\Gamma(2 - \alpha)}{t^{1-\alpha}}(\Delta t) \tag{12}$$

to α -order. Introducing Eq. (12) into Eq. (10) yields for the time rate of change of mass within the control volume in Fig. 2 with respect to α -order fractional time increments:

$$\frac{\Gamma(2 - \alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \rho(\bar{x}, t)}{(\partial t)^\alpha} \Delta x_1 \Delta x_2 \Delta x_3. \tag{13}$$

Since the time rate of change of mass within the control volume of Fig. 2 is inversely related to the net flux through the control volume, Eqs. (8) and (13) can be combined to yield

$$\frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \rho(\bar{x}, t)}{(\partial t)^\alpha} = - \sum_{i=1}^3 \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (\rho(\bar{x}, t) u_i(\bar{x}, t)), \quad \bar{x} = (x_1, x_2, x_3), \quad (14)$$

as the general continuity equation of unsteady, multidimensional fluid flow in fractional time and multi-fractional space which holds both for compressible as well as incompressible flows.

Fractional continuity Eq. (14) for fluid flow can also be written as

$$\frac{\partial^\alpha \rho(\bar{x}, t)}{(\partial t)^\alpha} = - \sum_{i=1}^3 \frac{t^{1-\alpha}}{\Gamma(2-\alpha)} \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (\rho(\bar{x}, t) u_i(\bar{x}, t)), \quad \bar{x} = (x_1, x_2, x_3). \quad (15)$$

Performing a dimensional analysis on Eq. (15) results in

$$\frac{M/L^3}{T^\alpha} = \frac{T^{1-\alpha}}{L^{1-\beta_i}} \frac{1}{L^{\beta_i}} \frac{M}{L^3} \frac{L}{T} = \frac{M/L^3}{T^\alpha} \quad (16)$$

which shows the dimensional consistency of the fractional continuity equation of the fluid flow.

Podlubny⁸ has shown that for $n-1 < \alpha$, $\beta_i < n$ where n is any positive integer, as α and $\beta_i \rightarrow n$, the Caputo fractional derivative of a function $f(y)$ to order α or β_i ($i = 1, 2, 3$) becomes the conventional n -th derivative of the function $f(y)$. Therefore, specializing the result of Podlubny⁸ to $n = 1$, for α and $\beta_i \rightarrow 1$, ($i = 1, 2, 3$), the continuity equation of fluid flow transforms into

$$\frac{\partial \rho(\bar{x}, t)}{\partial t} = - \sum_{i=1}^3 \frac{\partial}{\partial x_i} (\rho(\bar{x}, t) u_i(\bar{x}, t)), \quad \bar{x} = (x_1, x_2, x_3), \quad (17)$$

which is the conventional continuity equation for fluid flow in integer time-space^{50,51}.

From the general fractional continuity Eqs. (14) or (15) for fluid flow it follows that the continuity equation for incompressible fluid flow with constant density in fractional time and multi-fractional space reduces to the form

$$\sum_{i=1}^3 \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (u_i(\bar{x}, t)) = 0 \quad (18)$$

which when α and $\beta_i \rightarrow 1$ ($i = 1, 2, 3$) results in

$$\sum_{i=1}^3 \frac{\partial}{\partial x_i} (u_i(\bar{x}, t)) = 0 \quad (19)$$

which is the conventional continuity equation for incompressible fluid flow.

Momentum equations of unsteady flow in fractional time and multifractional space. The net momentum flux through the control volume in Fig. 2 may be expressed as:

$$\begin{aligned} & [\rho u_i u_1 |_{(x_1, x_2, x_3; t)} - \rho u_i u_1 |_{(x_1 - \Delta x_1, x_2, x_3; t)}] \Delta x_2 \Delta x_3 + [\rho u_i u_2 |_{(x_1, x_2, x_3; t)} - \rho u_i u_2 |_{(x_1, x_2 - \Delta x_2, x_3; t)}] \Delta x_1 \Delta x_3 \\ & + [\rho u_i u_3 |_{(x_1, x_2, x_3; t)} - \rho u_i u_3 |_{(x_1, x_2, x_3 - \Delta x_3; t)}] \Delta x_1 \Delta x_2. \end{aligned} \quad (20)$$

along directions x_i , $i = 1, 2, 3$. Meanwhile the net pressure forces on the control volume surface may be expressed as:

$$\begin{aligned} & (P |_{(x_1, x_2, x_3; t)} - P |_{(x_1 - \Delta x_1, x_2, x_3; t)}) \Delta x_2 \Delta x_3 \\ & (P |_{(x_1, x_2, x_3; t)} - P |_{(x_1, x_2 - \Delta x_2, x_3; t)}) \Delta x_1 \Delta x_3 \\ & (P |_{(x_1, x_2, x_3; t)} - P |_{(x_1, x_2, x_3 - \Delta x_3; t)}) \Delta x_1 \Delta x_2 \end{aligned} \quad (21)$$

Again, referring to Fig. 3, the net stress (viscous) forces on the control volume surface may be expressed as:

$$\begin{aligned} & (\tau_{i1} |_{(x_1, x_2, x_3; t)} - \tau_{i1} |_{(x_1 - \Delta x_1, x_2, x_3; t)}) \Delta x_2 \Delta x_3 + (\tau_{i2} |_{(x_1, x_2, x_3; t)} - \tau_{i2} |_{(x_1, x_2 - \Delta x_2, x_3; t)}) \Delta x_1 \Delta x_3 \\ & + (\tau_{i3} |_{(x_1, x_2, x_3; t)} - \tau_{i3} |_{(x_1, x_2, x_3 - \Delta x_3; t)}) \Delta x_1 \Delta x_2 \end{aligned} \quad (22)$$

along directions x_i , $i = 1, 2, 3$. Finally, the body force on the control volume may be expressed as:

$$-\rho F_i \Delta x_1 \Delta x_2 \Delta x_3, \quad i = 1, 2, 3. \quad (23)$$

By introducing Eq. (4) into Eqs. (20)–(23) with $\Delta x_i = x_i$, $i = 1, 2, 3$, and expressing the resulting Caputo derivative ${}_0 D_x^\beta f(x)$ by $\frac{\partial^\beta f(x)}{(\partial x)^\beta}$, the net momentum flux in the x_i direction, may be expressed to β_i -order, $i = 1, 2, 3$, as:

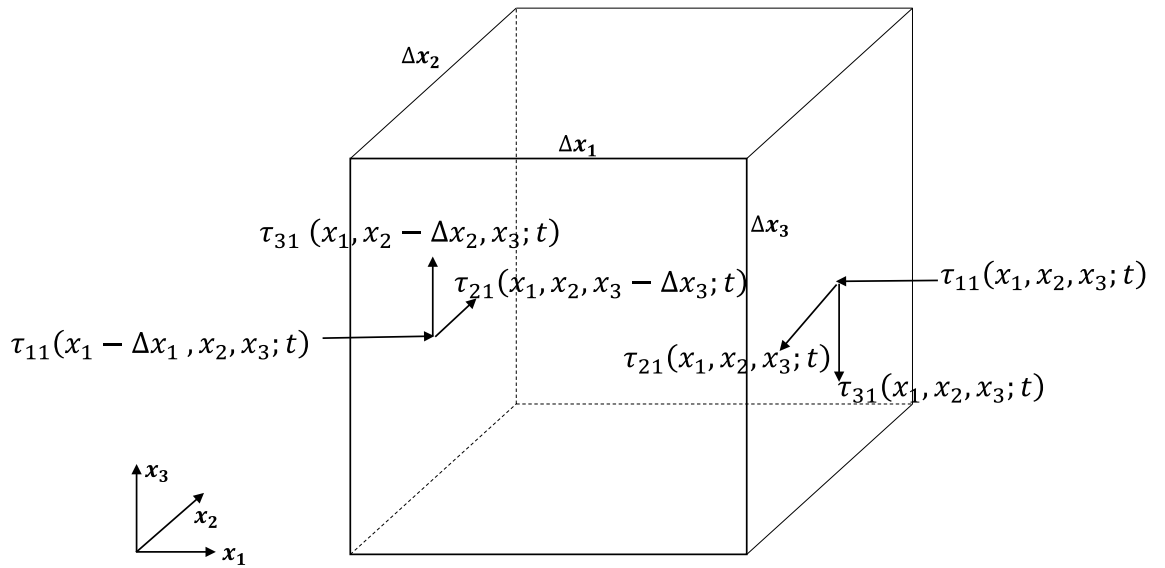


Figure 3. Surface forces in the momentum equation.

$$\begin{aligned}
 & \frac{(\Delta x_1)^{\beta_1}}{\Gamma(\beta_1 + 1)} \left(\frac{\partial}{\partial x_1} \right)^{\beta_1} (\rho(\bar{x}; t) u_i(\bar{x}; t) u_1(\bar{x}; t)) \Delta x_2 \Delta x_3 \\
 & + \frac{(\Delta x_2)^{\beta_2}}{\Gamma(\beta_2 + 1)} \left(\frac{\partial}{\partial x_2} \right)^{\beta_2} (\rho(\bar{x}; t) u_i(\bar{x}; t) u_2(\bar{x}; t)) \Delta x_1 \Delta x_3 \\
 & + \frac{(\Delta x_3)^{\beta_3}}{\Gamma(\beta_3 + 1)} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} (\rho(\bar{x}; t) u_i(\bar{x}; t) u_3(\bar{x}; t)) \Delta x_1 \Delta x_2 \\
 & + \frac{(\Delta x_i)^{\beta_i}}{\Gamma(\beta_i + 1)} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (P(\bar{x}; t)) \Delta x_j \Delta x_k \\
 & + \frac{(\Delta x_1)^{\beta_1}}{\Gamma(\beta_1 + 1)} \left(\frac{\partial}{\partial x_1} \right)^{\beta_1} (\tau_{i1}(\bar{x}; t)) \Delta x_2 \Delta x_3 \\
 & + \frac{(\Delta x_2)^{\beta_2}}{\Gamma(\beta_2 + 1)} \left(\frac{\partial}{\partial x_2} \right)^{\beta_2} (\tau_{i2}(\bar{x}; t)) \Delta x_1 \Delta x_3 \\
 & + \frac{(\Delta x_3)^{\beta_3}}{\Gamma(\beta_3 + 1)} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} (\tau_{i3}(\bar{x}; t)) \Delta x_1 \Delta x_2 - \rho F_i \Delta x_1 \Delta x_2 \Delta x_3, \\
 & i = 1, 2, 3, j \neq k \neq i, j + k + i = 3, 1 \leq j, k \leq 3, j \text{ and } k \text{ integers.}
 \end{aligned} \tag{24}$$

Introducing Eq. (7) into Eq. (24) results in the net momentum flux expressed with respect to β_i -order fractional space in the x_i direction, $i = 1, 2, 3$, as:

$$\begin{aligned}
 & \frac{\Gamma(2 - \beta_1)}{x_1^{1-\beta_1}} \left(\frac{\partial}{\partial x_1} \right)^{\beta_1} (\rho(\bar{x}; t) u_i(\bar{x}; t) u_1(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3 \\
 & + \frac{\Gamma(2 - \beta_2)}{x_2^{1-\beta_2}} \left(\frac{\partial}{\partial x_2} \right)^{\beta_2} (\rho(\bar{x}; t) u_i(\bar{x}; t) u_2(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3 \\
 & + \frac{\Gamma(2 - \beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} (\rho(\bar{x}; t) u_i(\bar{x}; t) u_3(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3 \\
 & + \frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (P(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3 \\
 & + \frac{\Gamma(2 - \beta_1)}{x_1^{1-\beta_1}} \left(\frac{\partial}{\partial x_1} \right)^{\beta_1} (\tau_{i1}(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3 \\
 & + \frac{\Gamma(2 - \beta_2)}{x_2^{1-\beta_2}} \left(\frac{\partial}{\partial x_2} \right)^{\beta_2} (\tau_{i2}(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3 \\
 & + \frac{\Gamma(2 - \beta_3)}{x_3^{1-\beta_3}} \left(\frac{\partial}{\partial x_3} \right)^{\beta_3} (\tau_{i3}(\bar{x}; t)) \Delta x_1 \Delta x_2 \Delta x_3 \\
 & - \rho(\bar{x}; t) F_i(\bar{x}; t) \Delta x_1 \Delta x_2 \Delta x_3, \quad i = 1, 2, 3.
 \end{aligned} \tag{25}$$

Meanwhile, the change of momentum within the control volume during (t-Δt, t) may be expressed as:

$$[\rho(\bar{x}, t) u_i(\bar{x}; t) - \rho(\bar{x}, t - \Delta t) u_i(\bar{x}; t - \Delta t)] \Delta x_1 \Delta x_2 \Delta x_3. \tag{26}$$

Hence, the time rate of change of momentum within the control volume may be expressed as:

$$\frac{[\rho(\bar{x}, t) u_i(\bar{x}; t) - \rho(\bar{x}, t - \Delta t) u_i(\bar{x}; t - \Delta t)]}{\Delta t} \Delta x_1 \Delta x_2 \Delta x_3, \quad i = 1, 2, 3. \tag{27}$$

Following the same procedure that led to Eqs. (10)–(12) with ρu_i replacing ρ in these equations, one obtains the time rate of change of momentum within the control volume with respect to α -order fractional time increments as:

$$\frac{\Gamma(2 - \alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \rho(\bar{x}, t) u_i(\bar{x}; t)}{(\partial t)^\alpha} \Delta x_1 \Delta x_2 \Delta x_3, \quad i = 1, 2, 3. \tag{28}$$

Since the time rate of momentum change within the control volume is inversely related to the net momentum flux through the control volume, Eqs. (25) and (28) can be combined to yield

$$\begin{aligned}
 & \frac{\Gamma(2 - \alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \rho(\bar{x}, t) u_i(\bar{x}; t)}{(\partial t)^\alpha} = - \sum_{j=1}^3 \frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j} \right)^{\beta_j} (\rho(\bar{x}, t) u_i(\bar{x}; t) u_j(\bar{x}; t)) \\
 & - \frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (P(\bar{x}, t)) + \sum_{j=1}^3 \frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j} \right)^{\beta_j} (\tau_{ij}(\bar{x}; t)) + \rho F_i(\bar{x}, t), \\
 & i = 1, 2, 3
 \end{aligned} \tag{29}$$

as the general momentum equation of unsteady fluid flow in fractional time and multi-fractional space. The body force F_i , $i = 1, 2, 3$, can be interpreted as the gravitational force g_i , $i = 1, 2, 3$ ⁵⁰. Under this interpretation the general momentum equations of unsteady fluid flow in fractional time and multi-fractional space may also be expressed as

$$\begin{aligned}
 & \frac{\Gamma(2 - \alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \rho(\bar{x}, t) u_i(\bar{x}; t)}{(\partial t)^\alpha} = - \sum_{j=1}^3 \frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j} \right)^{\beta_j} (\rho(\bar{x}, t) u_i(\bar{x}; t) u_j(\bar{x}; t)) \\
 & - \frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (P(\bar{x}, t)) + \sum_{j=1}^3 \frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j} \right)^{\beta_j} (\tau_{ij}(\bar{x}; t)) + \rho g_i(\bar{x}, t), \\
 & i = 1, 2, 3
 \end{aligned} \tag{30}$$

where the surface forces τ_{ij} will need to be defined in terms of flow velocities differently for incompressible and compressible fluid flows for the closure of the equation. This issue will be addressed later in the study.

The fractional momentum Eq. (30) for incompressible fluid flow can also be written as

$$\begin{aligned} \frac{\partial^\alpha \rho(\bar{x}, t) u_i(\bar{x}; t)}{(\partial t)^\alpha} &= - \sum_{j=1}^3 \frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \frac{t^{1-\alpha}}{\Gamma(2 - \alpha)} \left(\frac{\partial}{\partial x_j} \right)^{\beta_j} (\rho(\bar{x}, t) u_i(\bar{x}; t) u_j(\bar{x}; t)) \\ &\quad - \frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \frac{t^{1-\alpha}}{\Gamma(2 - \alpha)} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (P(\bar{x}, t)) + \sum_{j=1}^3 \frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \frac{t^{1-\alpha}}{\Gamma(2 - \alpha)} \left(\frac{\partial}{\partial x_j} \right)^{\beta_j} (\tau_{ij}(\bar{x}; t)) \\ &\quad + \frac{t^{1-\alpha}}{\Gamma(2 - \alpha)} \rho g_i(\bar{x}, t) \end{aligned} \tag{31}$$

Euler’s equation in fractional time–space. If the fluid flow has no friction, that is, if the shearing stresses τ_{ij} are zero and the normal forces are simply the pressure forces, the flow system is called inviscid. Then Eqs. (30) or (31) simplify to

$$\begin{aligned} \frac{\partial^\alpha \rho(\bar{x}, t) u_i(\bar{x}; t)}{(\partial t)^\alpha} &= - \sum_{j=1}^3 \frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \frac{t^{1-\alpha}}{\Gamma(2 - \alpha)} \left(\frac{\partial}{\partial x_j} \right)^{\beta_j} (\rho(\bar{x}, t) u_i(\bar{x}; t) u_j(\bar{x}; t)) \\ &\quad - \frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \frac{t^{1-\alpha}}{\Gamma(2 - \alpha)} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (P(\bar{x}, t)) + \frac{t^{1-\alpha}}{\Gamma(2 - \alpha)} \rho g_i(\bar{x}, t), i = 1, 2, 3. \end{aligned} \tag{32}$$

In analogy to Euler’s equation for inviscid fluid flow in integer time–space, Eq. (32) may be called as “Euler’s equation for fluid flow in fractional time–space”.

Momentum equations for incompressible fluid flow under Stokes viscosity law in fractional time and multifractional space. For incompressible fluid flow, the shear stresses can be expressed in terms of flow velocities using Stokes viscosity law as⁵⁰:

$$\tau_{ii} = 2\mu \frac{\partial u_i}{\partial x_i}, \quad i = 1, 2, 3 \tag{33}$$

$$\tau_{ij} = \tau_{ji} = \mu \left(\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right), \quad i, j = 1, 2, 3 \tag{34}$$

in the conventional integer space. In Eqs. (33) and (34) μ is the viscosity coefficient. Then using Eqs. (4) and (7) on Eqs. (33) and (34) results in

$$\tau_{ii} = 2\mu \left(\frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} u_i}{(\partial x_i)^{\beta_i}} \right) = \mu \left[\frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} u_i}{(\partial x_i)^{\beta_i}} + \frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} u_i}{(\partial x_i)^{\beta_i}} \right], \quad i = 1, 2, 3 \tag{35}$$

and

$$\tau_{ij} = \tau_{ji} = \mu \left[\frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \frac{\partial^{\beta_j} u_i}{(\partial x_j)^{\beta_j}} + \frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} u_j}{(\partial x_i)^{\beta_i}} \right], \quad i, j = 1, 2, 3 \tag{36}$$

for the Stokes viscosity relations in multi-fractional space.

Substituting Eqs. (35) and (36) into Eq. (29) and noting the fluid density is constant for incompressible fluid flow results in the momentum equations

$$\begin{aligned} \rho \frac{\Gamma(2 - \alpha)}{t^{1-\alpha}} \frac{\partial^\alpha u_i(\bar{x}; t)}{(\partial t)^\alpha} &= -\rho \sum_{j=1}^3 \frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j} \right)^{\beta_j} (u_i(\bar{x}; t) u_j(\bar{x}; t)) \\ &\quad + \rho g_i(\bar{x}, t) - \frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i} \right)^{\beta_i} (P(\bar{x}, t)) \\ &\quad + \mu \sum_{j=1}^3 \frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j} \right)^{\beta_j} \left(\frac{\Gamma(2 - \beta_j)}{x_j^{1-\beta_j}} \frac{\partial^{\beta_j} u_i}{(\partial x_j)^{\beta_j}} + \frac{\Gamma(2 - \beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} u_j}{(\partial x_i)^{\beta_i}} \right), i = 1, 2, 3. \end{aligned} \tag{37}$$

Next, the flow velocities $u_i(\bar{x}; t)$ ($i=1,2,3$) are considered analytic functions, and it is noted that the fractional scaling powers in time and space are between zero and one, that is $0 < \alpha, \beta_i < 1$, ($i=1,2,3$). As such, the Caputo fractional derivatives $\left(\frac{\partial}{\partial x_j} \right)^{\beta_j}$ and $\left(\frac{\partial}{\partial x_i} \right)^{\beta_i}$ that operate on the flow velocities $u_j(\bar{x}; t)$ ($j=1,2,3$) will commute⁵². Combining this property of the above Caputo fractional derivatives on the last line on the right-hand-side of Eq. (37) with the fractional continuity Eq. (18) for incompressible fluid flow results in the governing equation

$$\begin{aligned} \rho \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha u_i(\bar{x}; t)}{(\partial t)^\alpha} &= -\rho \sum_{j=1}^3 \frac{\Gamma(2-\beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j}\right)^{\beta_j} (u_i(\bar{x}; t) u_j(\bar{x}; t)) \\ &+ \rho g_i(\bar{x}, t) - \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i}\right)^{\beta_i} (P(\bar{x}, t)) \\ &+ \mu \sum_{j=1}^3 \frac{\Gamma(2-\beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j}\right)^{\beta_j} \left(\frac{\Gamma(2-\beta_j)}{x_j^{1-\beta_j}} \frac{\partial^{\beta_j} u_i}{(\partial x_j)^{\beta_j}}\right), i = 1, 2, 3 \end{aligned} \tag{38}$$

as the momentum equations for incompressible fluid flow with constant density ρ and constant viscosity μ in β_i -scaled ($i = 1, 2, 3$) multi-fractional space and in α -scaled fractional time.

As mentioned earlier, Podlubny⁸ has shown that for $n-1 < \alpha, \beta_i < n$ where n is any positive integer, as α and $\beta_i \rightarrow n$, the Caputo fractional derivative of a function $f(y)$ to order α or β_i ($i = 1, 2, 3$) becomes the conventional n -th derivative of the function $f(y)$. Therefore, specializing the result of Podlubny⁸ to $n = 1$, for α or $\beta_i \rightarrow 1$, ($i = 1, 2, 3$), the fractional momentum Eqs. (38) of incompressible fluid flow transform into

$$\rho \frac{\partial u_i(\bar{x}; t)}{\partial t} = -\rho \sum_{j=1}^3 \frac{\partial}{\partial x_j} (u_i(\bar{x}; t) u_j(\bar{x}; t)) + \rho g_i(\bar{x}, t) - \frac{\partial}{\partial x_i} (P(\bar{x}, t)) + \mu \sum_{j=1}^3 \frac{\partial^2 u_i}{\partial x_j^2}, i = 1, 2, 3 \tag{39}$$

which reduce to

$$\rho \frac{\partial u_i(\bar{x}; t)}{\partial t} = -\rho \sum_{j=1}^3 u_j(\bar{x}; t) \frac{\partial}{\partial x_j} (u_i(\bar{x}; t)) + \rho g_i(\bar{x}, t) - \frac{\partial}{\partial x_i} (P(\bar{x}, t)) + \mu \sum_{j=1}^3 \frac{\partial^2 u_i}{\partial x_j^2}, i = 1, 2, 3 \tag{40}$$

which are the conventional Navier–Stokes equations for Newtonian, incompressible fluid flow with constant density and viscosity⁵⁰. Within this framework, the Eq. (38) for incompressible fluid flow in fractional time and multi-fractional space may be interpreted as the extension of the corresponding Navier–Stokes equations to fractional time and multi-fractional space.

Momentum equations for compressible fluid flow under Stokes viscosity law in fractional time and multifractional space. In the case of compressible viscous fluid flow, while the shear stresses are the same as in incompressible flow, the Stokes relations need to be modified for the effect of volume change in the fluid due to compression, leading to the normal forces σ_{ii} ($i = 1, 2, 3$) being expressed as^{51,53},

$$\sigma_{ii} = -p + \tau_{ii} - \frac{2}{3} \mu \sum_{k=1}^3 \frac{\partial u_k}{\partial x_k}, i = 1, 2, 3 \tag{41}$$

$$\sigma_{ii} = -p + 2\mu \frac{\partial u_i}{\partial x_i} - \frac{2}{3} \mu \sum_{k=1}^3 \frac{\partial u_k}{\partial x_k}, i = 1, 2, 3 \tag{42}$$

Then using Eqs. (4) and (7) on Eq. (42) results in

$$\sigma_{ii} = -p + \mu \left[\frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} u_i}{(\partial x_i)^{\beta_i}} + \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} u_i}{(\partial x_i)^{\beta_i}} \right] - \frac{2}{3} \mu \sum_{k=1}^3 \frac{\Gamma(2-\beta_k)}{x_k^{1-\beta_k}} \frac{\partial^{\beta_k} u_k}{(\partial x_k)^{\beta_k}}, i = 1, 2, 3 \tag{43}$$

Combining Eqs. (36) and (43) with modified normal forces due to fluid compression, with Eq. (29) results in the fractional momentum equations

$$\begin{aligned} \frac{\Gamma(2-\alpha)}{t^{1-\alpha}} \frac{\partial^\alpha \rho(\bar{x}, t) u_i(\bar{x}; t)}{(\partial t)^\alpha} &= -\sum_{j=1}^3 \frac{\Gamma(2-\beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j}\right)^{\beta_j} (\rho(\bar{x}, t) u_i(\bar{x}; t) u_j(\bar{x}; t)) \\ &+ \rho(\bar{x}, t) g_i(\bar{x}, t) - \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i}\right)^{\beta_i} (P(\bar{x}, t)) \\ &+ \sum_{j=1}^3 \frac{\Gamma(2-\beta_j)}{x_j^{1-\beta_j}} \left(\frac{\partial}{\partial x_j}\right)^{\beta_j} \left[\mu \frac{\Gamma(2-\beta_j)}{x_j^{1-\beta_j}} \frac{\partial^{\beta_j} u_i}{(\partial x_j)^{\beta_j}} + \mu \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \frac{\partial^{\beta_i} u_j}{(\partial x_i)^{\beta_i}} \right] \\ &- \frac{\Gamma(2-\beta_i)}{x_i^{1-\beta_i}} \left(\frac{\partial}{\partial x_i}\right)^{\beta_i} \left[\frac{2}{3} \mu \sum_{k=1}^3 \frac{\Gamma(2-\beta_k)}{x_k^{1-\beta_k}} \frac{\partial^{\beta_k} u_k}{(\partial x_k)^{\beta_k}} \right], i = 1, 2, 3 \end{aligned} \tag{44}$$

for compressible fluid flow in β_i -scaled ($i = 1, 2, 3$) multi-fractional space and in α -scaled fractional time.

Again specializing the result of Podlubny⁸ to $n = 1$, for α or $\beta_i \rightarrow 1$, ($i = 1, 2, 3$), that the Caputo fractional derivative of a function $f(y)$ to order α or β_i ($i = 1, 2, 3$) becomes the conventional derivative of the function $f(y)$, and applying it to Eq. (44) results in

$$\begin{aligned} \frac{\partial \rho(\bar{x}, t) u_i(\bar{x}; t)}{\partial t} &= - \sum_{j=1}^3 \frac{\partial}{\partial x_j} (\rho(\bar{x}, t) u_i(\bar{x}; t) u_j(\bar{x}; t)) \\ &+ \rho(\bar{x}, t) g_i(\bar{x}, t) - \frac{\partial}{\partial x_i} (P(\bar{x}, t)) \\ &+ \sum_{j=1}^3 \frac{\partial}{\partial x_j} \left[\mu \frac{\partial u_i}{\partial x_j} + \mu \frac{\partial u_j}{\partial x_i} \right] - \frac{\partial}{\partial x_i} \left[\frac{2}{3} \mu \sum_{k=1}^3 \frac{\partial u_k}{\partial x_k} \right], i = 1, 2, 3 \end{aligned} \tag{45}$$

which are consistent with the conventional Navier–Stokes momentum equations for compressible flow⁵⁴. Introducing the continuity Eq. (17) into Eq. (45) results in

$$\begin{aligned} \rho(\bar{x}, t) \frac{\partial u_i(\bar{x}; t)}{\partial t} &= -\rho(\bar{x}, t) \sum_{j=1}^3 u_j(\bar{x}; t) \frac{\partial}{\partial x_j} (u_i(\bar{x}; t)) \\ &+ \rho(\bar{x}, t) g_i(\bar{x}, t) - \frac{\partial}{\partial x_i} (P(\bar{x}, t)) \\ &+ \sum_{j=1}^3 \frac{\partial}{\partial x_j} \left[\mu \frac{\partial u_i}{\partial x_j} + \mu \frac{\partial u_j}{\partial x_i} \right] - \frac{\partial}{\partial x_i} \left[\frac{2}{3} \mu \sum_{k=1}^3 \frac{\partial u_k}{\partial x_k} \right], i = 1, 2, 3 \end{aligned} \tag{46}$$

which are the conventional Navier–Stokes equations for compressible flow in detailed form. Hence, the conventional Navier–Stokes equations system (46) for compressible flow can be interpreted as the special case of the fractional equations system (44) for compressible flow in fractional time and multi-fractional space when the fractional powers become unity.

Numerical application. In order to investigate the capabilities of the proposed fractional governing equations of hydrodynamics, the first Stokes Problem (i.e., flow due to a wall suddenly set into motion) is selected. A fluid with constant density and viscosity is bounded by a solid wall (at $x_2 = 0$), which is set in motion in positive x_1 direction at $t = 0$ with a constant velocity U_0 . There is no pressure gradient or gravity force in x_1 direction. Then the conventional Navier–Stokes Equation (NSE) for this situation may be expressed as (see example 4.1–1 in Bird et al.⁵⁵):

$$\rho \frac{\partial u_1(x_2, t)}{\partial t} = \mu \frac{\partial^2 u_1(x_2, t)}{\partial x_2^2} \tag{47}$$

where the initial and boundary conditions are

$$\begin{aligned} u_1(x_2, t = 0) &= 0; \\ u_1(x_2 = 0, t \geq 0) &= U_0; \\ u_1(x_2 = \infty, t \geq 0) &= 0. \end{aligned} \tag{48}$$

This is a simple unsteady flow problem with analytical solution (Equation 4.1-15 in Bird et al.⁵⁵)

$$u_1(x_2, t) = U_0 \cdot \operatorname{erfc} \left(\frac{x_2}{\sqrt{4\nu t}} \right) \tag{49}$$

where erfc is the complementary error function (i.e., $\operatorname{erfc}(x) = 1 - \operatorname{erf}(x)$) and $\nu = \mu/\rho$. In this application, viscosity ν is $0.001 \text{ m}^2/\text{s}$, total simulation time T is 5 h, and velocity U_0 is 1 m/s. The fractional form of this problem can be written as

$$\frac{\Gamma(2 - \alpha)}{t^{1-\alpha}} \frac{\partial^\alpha u_1(x_2, t)}{(\partial t)^\alpha} = \nu \frac{\Gamma(2 - \beta)}{x_2^{1-\beta}} \left(\frac{\partial}{\partial x_2} \right)^\beta \frac{\Gamma(2 - \beta)}{x_2^{1-\beta}} \frac{\partial^\beta u_1}{(\partial x_2)^\beta} \tag{50}$$

with the same initial and boundary conditions.

In order to solve Eq. (50) numerically, a first-order approximation of the Caputo’s fractional time derivative⁴⁵ and a second-order accurate Caputo’s fractional space derivative⁵⁶ schemes are coupled similar to the numerical solution of the fractional open channel flow problem as reported in Ercan and Kavvas⁵⁷. When the fractional powers of space and time derivatives of Eq. (50) become one, the solution should converge to that of the conventional form of this Eq. (47). x_1 -direction velocity u_1 normalized by the boundary velocity U_0 (i.e., u_1/U_0) is plotted in Fig. 4. As shown in Fig. 4, the velocity profiles of the analytic solution (Eq. 49) of the conventional governing Eq. (47) compare well with those of the numerical solution of the fractional governing Eq. (50) when powers of the fractional space and time derivatives are one ($\beta = \alpha = 1$).

In order to explore the contribution of powers of space and time fractional derivatives on flow, Figs. 5, 6 and 7 are plotted for the simple flow due to a wall suddenly set into motion. This is still a relatively simple flow

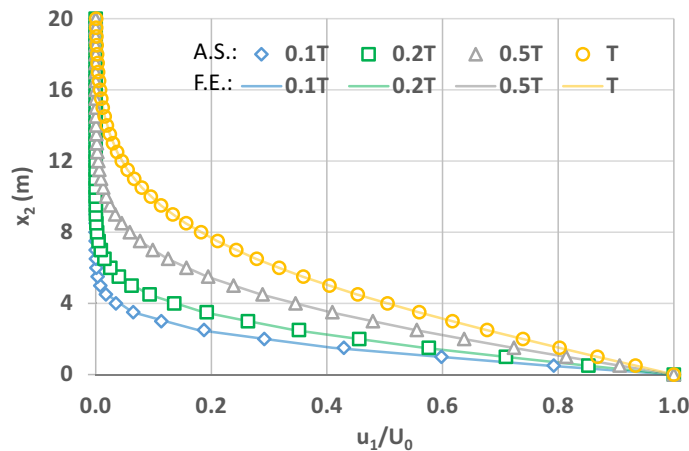


Figure 4. Velocity profiles of x_1 direction velocity u_1 normalized by boundary velocity U_0 when space and time fractional derivative powers are 1. Solid lines correspond to simulations by fractional governing equation (F.E.) when time $t = 0.1T, 0.2T, 0.5T, T$. Shapes (diamond, square, triangle, and circle) represent the corresponding analytical solutions (A.S.) of the conventional governing equation, respectively.

problem due to above listed assumptions, and will help us to understand the effects of fractional powers on flow. As explained in Zaslavsky³⁰, fractional governing equations account for the non-Fickian flow processes, including sub-diffusive (i.e., slow) and super-diffusive (i.e., fast) processes. In this regard, Zaslavsky³⁰ defined the transport exponent of his fractional kinetic equation as $\mu = \alpha/\beta$, expressed here as such in order to be consistent with the above notation, to quantify competing time and space fractional derivative powers. Therefore, the transport exponent μ quantifies competing sub- and super-diffusivity. $\mu = 1$ corresponds to normal diffusion, $\mu < 1$ sub-diffusion, and $\mu > 1$ super-diffusion. Before investigating the effects of the time and space fractional powers, note that flow velocities are fixed at the boundary conditions at $x_2 = 0$ and $x_2 = \infty$. Therefore, the effects are smaller in the vicinity of these boundaries and higher away from them. As such, the comparisons below for the solutions of fractional and integer order governing equations correspond to x_2 locations away from the boundaries.

For the case when the power of the time fractional derivative is one ($\alpha = 1$), the velocities by fractional governing equations are higher as power of the space fractional derivative is less than one ($\beta < 1$). In this case Zaslavsky³⁰'s transport exponent $\mu = \alpha/\beta > 1$ corresponds to super-diffusion. The difference between the velocity by the conventional governing equation ($\beta = \alpha = 1$) and that by the fractional governing equation (when $\beta < 1$ and $\alpha = 1$) increases through time for a fixed x_2 location. The same initial condition is used for the fractional and integer governing equations; therefore, the velocity differences are smaller close to $t = 0$. Furthermore, for a fixed simulation time, the velocity for a specific x_2 location (especially away from the moving plate) increases as the fractional space derivative power decreases from 1 (see Fig. 5a–c).

For the case when the power of the space fractional derivative is one ($\beta = 1$), the velocities by fractional governing equations are lower as the power of the time fractional derivative is less than one ($\alpha < 1$). In this case Zaslavsky³⁰'s transport exponent $\mu = \alpha/\beta < 1$ corresponds to sub-diffusion. The difference between the velocity by the conventional governing equation (or the fractional governing equation when $\beta = \alpha = 1$) and that by the fractional governing equation ($\beta < 1, \alpha = 1$) increases at later times because the initial condition dominates for smaller times, similar to $\alpha = 1$ case. However, for a fixed simulation time, the velocity at a specific x_2 location (especially away from the moving plate) decreases as the fractional time derivative power decreases from 1 (see Fig. 6a–c).

When the time and space fractional derivative powers are equal and less than one ($\beta = \alpha < 1$), the effects of sub- and super-diffusion are superimposed (Fig. 7). The transport coefficient for this case becomes $\mu = \alpha/\beta = 1$, displaying normal diffusion in theory. However, as shown in Fig. 7, when α and β are equal and close to 1, the velocity, at a fixed x_2 location close to the moving plate at $x_2 = 0$, does not change for both the conventional and the fractional governing equations. However, for a fixed simulation time, the velocity for a specific x_2 location away from the moving plate increases as the fractional space and time derivative powers decrease from 1 (see Fig. 7a–c).

Concluding remarks

The governing equations of unsteady multi-dimensional incompressible and compressible flows in fractional time and multi-fractional space were developed in this study. Since the time behaviour of fluid flows in various fields of engineering are as important as their behaviour in space, the governing multi-dimensional fluid flow equations not only in multi-fractional space but also in fractional time were attempted to be developed in this study. Also, due to the observed anisotropy in fluid flow processes in nature, the fractional scaling of fluid flows was addressed by different fractional powers in different Euclidean directions, resulting in governing equations in multi-fractional space. When their fractional powers in time and in multi-fractional space are specified to unit integer values, the developed fractional equations of continuity and momentum for incompressible and compressible fluid flows reduce to the corresponding conventional Navier–Stokes equations. As such, these

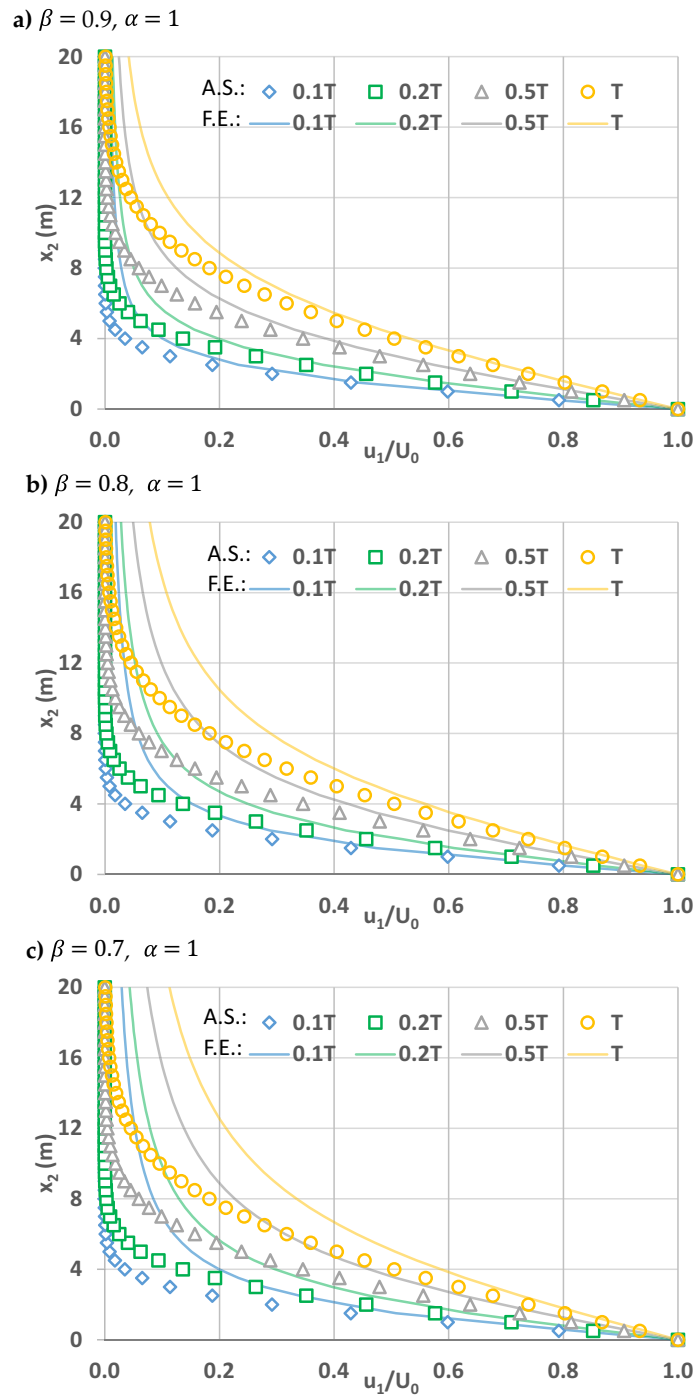


Figure 5. Velocity profiles of x_1 direction velocity u_1 normalized by boundary velocity U_0 when time and space fractional derivative powers $\alpha = 1$ and (a) $\beta = 0.9$, (b) $\beta = 0.8$, (c) $\beta = 0.7$. Solid lines correspond to simulations by the fractional governing equation (F.E.) when time $t = 0.1 T, 0.2 T, 0.5 T, T$. Shapes (diamond, square, triangle, and circle) represent the analytical solutions (A.S.) of the conventional governing equation at corresponding times.

fractional governing equations for incompressible and compressible fluid flows may be interpreted as generalizations of the conventional Navier–Stokes equations. For the frictionless flow conditions, the corresponding fractional governing equations were also developed as a special case of the fractional governing equations of incompressible flow. When their derivative fractional powers are specified to unit integers, these equations are shown to reduce to the conventional Euler equations.

The capabilities of the developed fractional governing equations of hydrodynamics were investigated by the first Stokes Problem (i.e., flow due to a wall suddenly set into motion). It was first shown that the results of

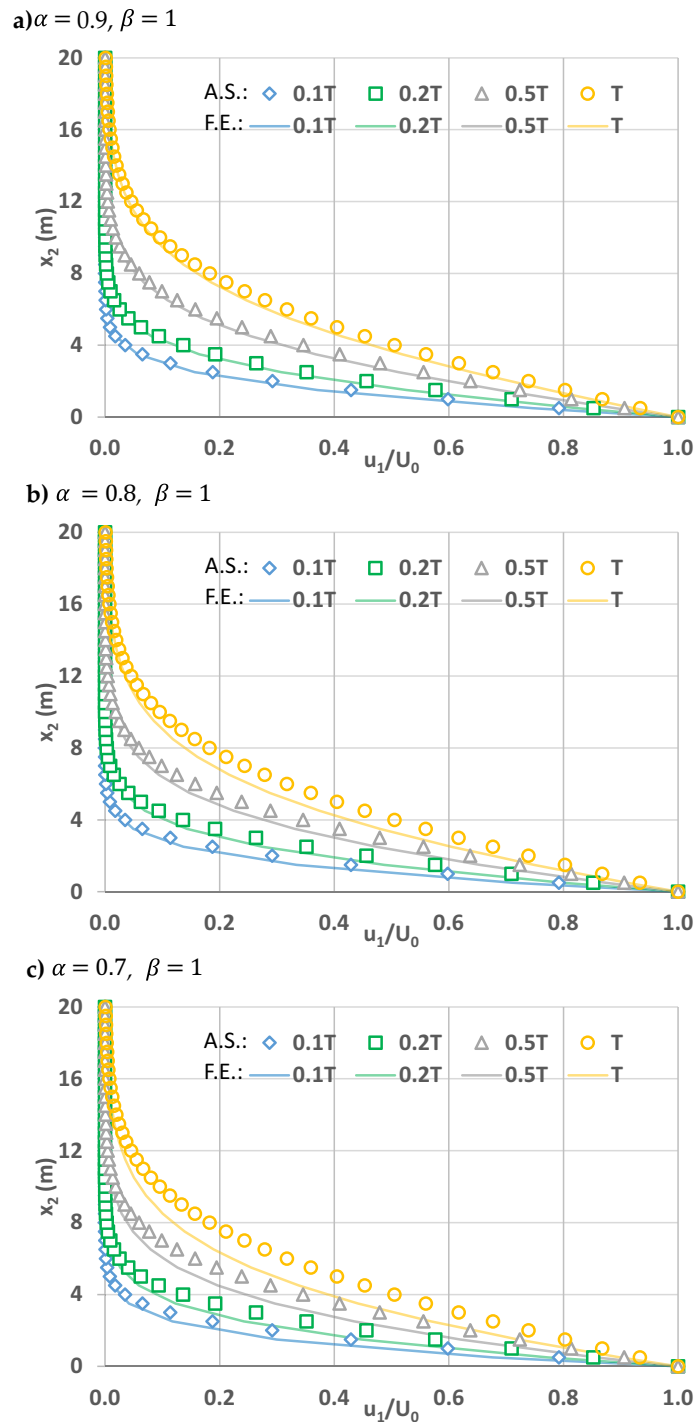


Figure 6. Velocity profiles of x_1 direction velocity u_1 normalized by boundary velocity U_0 when space and time fractional derivative powers when $\beta = 1$ and (a) $\alpha = 0.9$, (b) $\alpha = 0.8$, (c) $\alpha = 0.7$. Solid lines correspond to simulations by the fractional governing equation (F.E.) when time $t = 0.1 T, 0.2 T, 0.5 T, T$. Shapes (diamond, square, triangle, and circle) represent the analytical solutions (A.S.) of the conventional governing equation at corresponding times.

fractional governing equations when powers of the fractional space and time derivatives are one ($\beta = \alpha = 1$) are the same as the analytical solution of the conventional integer order governing equations. Next, the sub- and super-diffusive behaviour of the fractional governing equations were explained in the context of Zaslavsky³⁰'s transport exponent framework. As shown in this numerical application's results, the developed fractional equations of fluid flow have the potential to accommodate both the sub-diffusive and the super-diffusive flow conditions in addition to the conventional case.

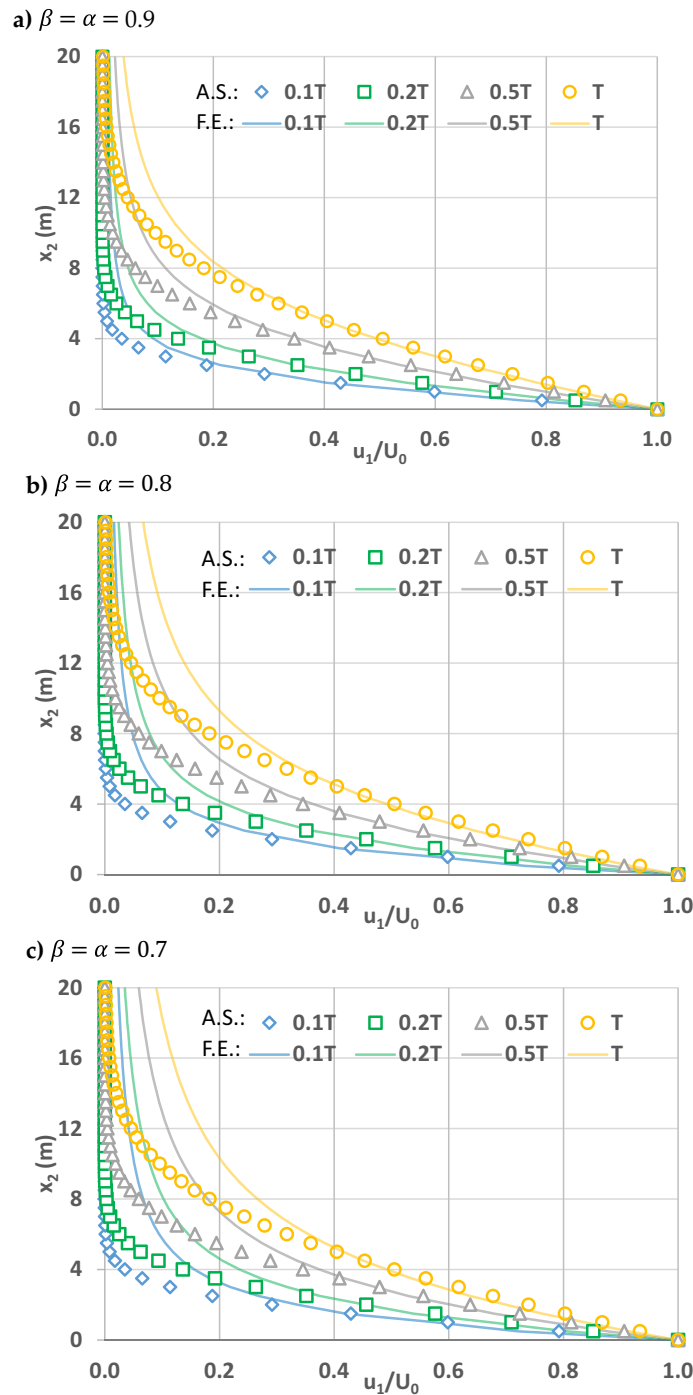


Figure 7. Velocity profiles of x_1 direction velocity u_1 normalized by boundary velocity U_0 when space and time fractional derivative powers are equal, (a) $\alpha = \beta = 0.9$, (b) $\alpha = \beta = 0.8$, (c) $\alpha = \beta = 0.7$. Solid lines correspond to simulations by the fractional governing equation (F.E.) when time $t = 0.1 T, 0.2 T, 0.5 T, T$. Shapes (diamond, square, triangle, and circle) represent the analytical solutions (A.S.) of the conventional governing equation at corresponding times.

Data availability

All data generated or analyzed during this study are available from the corresponding author upon reasonable request.

Received: 25 April 2022; Accepted: 20 September 2022

Published online: 11 November 2022

References

- Euler, L. Memoire dans le tome V des comment. *Saint Petersb. Annees* **55**, 5 (1730).
- Lagrange, J. L. Sur une nouvelle espece de calcul relatif a la differentiation et al. integration des quantites variables. *Nouv. Mem. Acad. R. Sci. Belles-Lett. Berlin* **3**, 1 (1772).
- Liouville, J. Mémoire sur le calcul des différentielles à indices quelconques. *J. Ec. Polytechn* **13**, 6 (1832).
- Grunwald, A. K. Uber 'begrenzte' Derivationen und deren Anwendung. *Z. Angew. Math. Phys.* **12**, 5 (1867).
- Weber, H. *Collected works of Bernhard Riemann* (Dover Publications, 1953).
- Oldham, K. B. & Spanier, J. *Fractional Calculus* (Academic Press, 1974).
- Ross, B. *Fractional Calculus and Its Applications* (Springer, 1975).
- Podlubny, I. *Fractional Differential Equations* (Academic Press, 1999).
- Hilfer, R. *Applications of Fractional Calculus in Physics* (World Scientific, 2000).
- Magin, R. L. *Fractional Calculus in Bioengineering* (Begell House Publishers, 2006).
- Hurst, H. E. Long-term storage capacity of reservoirs. *Trans. Am. Soc. Civ. Eng.* **116**, 770–799 (1951).
- Nordin, C. F., McQuivey, R. S. & Mejia, J. M. Hurst phenomenon in turbulence. *Water Resour. Res.* **8**, 1480–1486 (1972).
- Moldese, M. Long memory of rivers from spatial aggregation. *Water Resour. Res.* **43**, 1 (2007).
- Szolgayova, E., Laaha, G., Blöschl, G. & Bucher, C. Factors influencing long range dependence in streamflow of European rivers. *Hydrol. Process.* **28**, 1573–1586 (2014).
- Kavvas, M. L., Ercan, A. & Polsinelli, J. Governing equations of transient soil water flow and soil water flux in multi-dimensional fractional anisotropic media and fractional time. *Hydrol. Earth Syst. Sci.* **21**, 1547–1557 (2017).
- Sudicky, E. A., Cherry, J. A. & Frind, E. O. Migration of contaminants in groundwater at a landfill: A case study. *J. Hydrol.* **63**, 81–108 (1983).
- Sidle, R. C., Nilsson, B., Hansen, M. & Fredericia, J. Spatially varying hydraulic and solute transport characteristics of a fractured till determined by field tracer tests, Funen, Denmark. *Water Resour. Res.* **34**, 2515–2527 (1998).
- Silliman, S. E. & Simpson, E. S. Laboratory evidence of the scale effect in dispersion of solutes in porous media. *Water Resour. Res.* **23**, 1667–1673 (1987).
- Levy, M. & Berkowitz, B. Measurement and analysis of non-Fickian dispersion in heterogeneous porous media. *J. Contam. Hydrol.* **64**, 203–226 (2003).
- Lovejoy, S. & Schertzer, D. Generalized scale invariance in the atmosphere and fractal models of rain. *Water Resour. Res.* **21**, 1233–1250 (1985).
- Bloomfield, P. Trends in global temperature. *Clim. Change* **21**, 1–16 (1992).
- Stephenson, D. B., Pavan, V. & Bojariu, R. Is the North Atlantic oscillation a random walk?. *Int. J. Climatol.* **20**, 1–18 (2000).
- Franzke, C. L. E., Osprey, S. M., Davini, P. & Watkins, N. W. A dynamical systems explanation of the hurst effect and atmospheric low-frequency variability. *Sci. Rep.* **5**, 9068 (2015).
- Yang, X.-J., Tenreiro Machado, J. A., Baleanu, D. & Cattani, C. On exact traveling-wave solutions for local fractional Korteweg-de Vries equation. *Chaos Interdiscip. J. Nonlinear Sci.* **26**, 084312 (2016).
- Shah, R., Khan, H., Kumam, P. & Arif, M. An analytical technique to solve the system of nonlinear fractional partial differential equations. *Mathematics* **7**, 505 (2019).
- Rashid, S. *et al.* A novel analytical view of time-fractional Korteweg-De Vries equations via a new integral transform. *Symmetry (Basel)* **13**, 1254 (2021).
- Yang, X.-J., Machado, J. A. T. & Hristov, J. Nonlinear dynamics for local fractional Burgers' equation arising in fractal flow. *Nonlinear Dyn.* **84**, 3–7 (2016).
- Abdel-Salam, E., Jazmati, M. S. & Ahmad, H. Geometrical study and solutions for family of burgers-like equation with fractional order space time. *Alexandria Eng. J.* **61**, 511–521 (2022).
- He, J.-H. Approximate analytical solution for seepage flow with fractional derivatives in porous media. *Comput. Methods Appl. Mech. Eng.* **167**, 57–68 (1998).
- Zaslavsky, G. M. Chaos, fractional kinetics, and anomalous transport. *Phys. Rep.* **371**, 461–580 (2002).
- Liu, S.-D., Fu, Z.-T. & Liu, S.-K. Fractional derivative dynamics of intermittent turbulence. *Acta Phys. Sin.* **63**, 074701 (2014).
- Chen, W. A speculative study of 2/3-order fractional Laplacian modeling of turbulence: Some thoughts and conjectures. *Chaos Interdiscip. J. Nonlinear Sci.* **16**, 023126 (2006).
- Mandelbrot, B. B. Topics on fractals in mathematics and physics. In *Challenges for the 21st Century Fundamental Sciences: Mathematics and Theoretical Physics* 461–478 (World Scientific, 2001).
- El-Shahed, M. & Salem, A. On the generalized Navier-Stokes equations. *Appl. Math. Comput.* **156**, 287–293 (2004).
- Momani, S. & Odibat, Z. Analytical solution of a time-fractional Navier-Stokes equation by Adomian decomposition method. *Appl. Math. Comput.* **177**, 488–494 (2006).
- Kumar, S., Kumar, D., Abbasbandy, S. & Rashidi, M. M. Analytical solution of fractional Navier-Stokes equation by using modified Laplace decomposition method. *AIN Shams Eng. J.* **5**, 569–574 (2014).
- Wu, J. Lower bounds for an integral involving fractional laplacians and the generalized Navier-Stokes equations in Besov spaces. *Commun. Math. Phys.* **263**, 803–831 (2006).
- Xu, H., Jiang, X. & Yu, B. Numerical analysis of the space fractional Navier-Stokes equations. *Appl. Math. Lett.* **69**, 94–100 (2017).
- Wu, J. The generalized incompressible Navier-Stokes equations in Besov spaces. *Dyn. Part. Differ. Equ.* **1**, 381–400 (2004).
- Li, X., Yang, X. & Zhang, Y. Error estimates of mixed finite element methods for time-fractional Navier-Stokes equations. *J. Sci. Comput.* **70**, 500–515 (2017).
- Zhang, J. & Wang, J. Numerical analysis for Navier-Stokes equations with time fractional derivatives. *Appl. Math. Comput.* **336**, 481–489 (2018).
- de Carvalho-Neto, P. M. & Planas, G. Mild solutions to the time fractional Navier-Stokes equations in RN. *J. Differ. Equ.* **259**, 2948–2980 (2015).
- Zhou, Y. & Peng, L. Weak solutions of the time-fractional Navier-Stokes equations and optimal control. *Comput. Math. Appl.* **73**, 1016–1027 (2017).
- Tarasov, V. E. Fractional hydrodynamic equations for fractal media. *Ann. Phys. (N. Y.)* **318**, 286–307 (2005).
- Murio, D. A. Implicit finite difference approximation for time fractional diffusion equations. *Comput. Math. Appl.* **56**, 1138–1145 (2008).
- Podlubny, I. *Fractional Differential Equations: An Introduction to Fractional Derivatives, Fractional Differential Equations, to Methods of Their Solution and Some of Their Applications* (Elsevier, 1998).
- Odibat, Z. M. & Shawagfeh, N. T. Generalized Taylor's formula. *Appl. Math. Comput.* **186**, 286–293 (2007).
- Usero, D. Fractional Taylor series for Caputo fractional derivatives. *Constr. Numer. Schemes* **2008**, 5 (2008).
- Li, M.-F., Ren, J.-R. & Zhu, T. In *Series Expansion in Fractional Calculus and Fractional Differential Equations*. arxiv.0910.4819 (2009).
- White, F. M. *Fluid Mechanics* 3rd edn. (McGraw Hill, 1994).
- Le Mehaute, B. *An Introduction to Hydrodynamics and Water Waves* (Springer, 1976).

52. Beghin, L. & Caputo, M. Commutative and associative properties of the Caputo fractional derivative and its generalizing convolution operator. *Commun. Nonlinear Sci. Numer. Simul.* **89**, 105338 (2020).
53. Stokes, G. G. On the theories of the internal friction of fluids in motion. *Trans. Cambri. Philos. Soc.* **8**, 287–305 (1845).
54. Ferziger, J. H. & Perić, M. *Computational Methods for Fluid Dynamics* (Springer, 2002).
55. Bird, R. B., Stewart, W. E. & Lightfoot, E. *Transport Phenomena* 2nd edn. (Wiley, 2002).
56. Odibat, Z. M. Computational algorithms for computing the fractional derivatives of functions. *Math. Comput. Simul.* **79**, 2013–2020 (2009).
57. Ercan, A. & Kavvas, M. L. Time-space fractional governing equations of one-dimensional unsteady open channel flow process: Numerical solution and exploration. *Hydrol. Process.* **31**, 2961–2971 (2017).

Author contributions

M.L.K.: conceptualization; methodology; formal analysis; writing—review & editing. A.E.: formal analysis; methodology; numerical application; visualization; writing—review & editing.

Competing interests

The authors declare no competing interests.

Additional information

Correspondence and requests for materials should be addressed to A.E.

Reprints and permissions information is available at www.nature.com/reprints.

Publisher's note Springer Nature remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.



Open Access This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

© The Author(s) 2022