SCIENTIFIC REPORTS

OPEN

SUBJECT AREAS: APPLIED PHYSICS MAGNETIC DEVICES MAGNETIC PROPERTIES AND MATERIALS METAMATERIALS

> Received 23 May 2013

Accepted 23 October 2013

Published 7 November 2013

Correspondence and requests for materials should be addressed to Z.-H.C. (zhcheng@ iphy.ac.cn)

Exceeding natural resonance frequency limit of monodisperse Fe₃O₄ nanoparticles via superparamagnetic relaxation

Ning-Ning Song, Hai-Tao Yang, Hao-Liang Liu, Xiao Ren, Hao-Feng Ding, Xiang-Qun Zhang & Zhao-Hua Cheng

State Key Laboratory of Magnetism and Beijing National Laboratory for Condensed Matter Physics, Institute of Physics, Chinese Academy of Sciences, Beijing 100190, China.

Magnetic nanoparticles have attracted much research interest in the past decades due to their potential applications in microwave devices. Here, we adopted a novel technique to tune cut-off frequency exceeding the natural resonance frequency limit of monodisperse Fe_3O_4 nanoparticles via superparamagnetic relaxation. We observed that the cut-off frequency can be enhanced from 5.3 GHz for Fe_3O_4 to 6.9 GHz for $Fe_3O_4@SiO_2$ core-shell structure superparamagnetic nanoparticles, which are much higher than the natural resonance frequency of 1.3 GHz for Fe_3O_4 bulk material. This finding not only provides us a new approach to enhance the resonance frequency beyond the Snoek's limit, but also extend the application for superparamagnetic nanoparticles to microwave devices.

The frequency response of magnetic moment to an alternating magnetic field plays a vital role in designing the microwave, and even terahertz devices¹⁻³. The miniaturization and rapid increase in frequencies of electric devices require that magnetic materials possess high resonance frequency, large permeability, and low magnetic loss. The natural resonance frequency, f_{r_0} originated from the magnetocrystalline anisotropy field, H_{K_0} is generally regarded as the upper limit frequency, i.e. cut-off frequency, of magnetic materials. For traditional spinel ferrites, their natural resonance frequencies typically fall near or below 1 GHz⁴. Although the resonance frequency can be enhanced by introducing additional magnetic anisotropies, including shape anisotropy, strain-induced anisotropy, as well as exchange anisotropy⁵⁻⁹, it is a great challenge to increase both resonance frequency and permeability simultaneously due to the Snoek's limit¹⁰, i.e. the product of the susceptibility and the resonance frequency is proportional to the saturation magnetization.

Magnetic nanoparticles have attracted much research interest in the past decades due to their potential applications in ultrahigh density magnetic storage¹¹, biomagnetism^{12,13}, and microwave absorption¹⁴. When the nanoparticle volume, V_P , is reduced to a certain extent that magnetic anisotropy energy, KV_P , is comparable to the thermal energy, k_BT , there exists a finite probability that the magnetization vector will reverse its direction by thermal fluctuation at certain temperature T. Both theoretical and experimental data indicated that the frequency dependence of the susceptibility for a single domain particle depended on the ratio of the magnetic anisotropy energy to the thermal energy ($\alpha = KV_P/k_BT$)^{15,16}. In the case of $\alpha \ll 1$, the real part of the complex susceptibility x'(f) decreases monotonically with increasing f, whilst the imaginary component, $\chi''(f)$, has a maximum at a frequency $f_b = 1/\tau$. τ is relaxation time is introduced to describe how rapidly this superparamagnetic/ferromagnetic relaxation takes place¹⁷.

$$\tau = \tau_0 e^{KV_p/k_B T} \tag{1}$$

where τ_0 is determined by the intrinsic precession rate of the spin moment in the equivalent field for magnetic anisotropy.

The frequency, $f_b = 1/\tau = f_0 e^{-\frac{\kappa v_p}{k_B T}}$, which superparamagnetic state transits to ferromagnetic one in frequency domain, will increase with decreasing the nanoparticle volume. Therefore, the superparamagnetic dynamics in



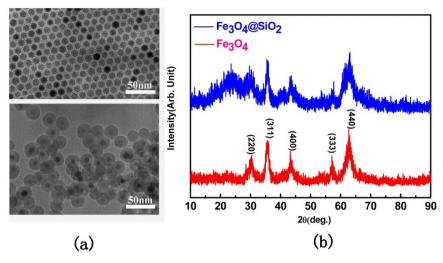


Figure 1 | (a) TEM micrographs; and (b) XRD patterns for as-prepared Fe₃O₄ nanoparticles and Fe₃O₄@SiO₂ core-shell composites.

GHz range, which is governed by both natural resonance frequency (f_r) and superparamagnetic/ferromagnetic relaxation rate (f_b) , should be attractive and challenging issue. The great challenge is whether f_b can be tuned to surpass f_r or not.

In contrast to conventional bulk microwave ferrites, the magnetic properties of superparamagnetic nanoparticles can be easily tuned by controlling the volume, shape, anisotropy, dipolar interaction between particles, and by applying exchange bias and electric field¹⁸⁻²¹. However, the effect of superparamagnetism on high frequency properties is not well understood. Here, we adopted a novel technique to tune the cut-off frequency exceeding the natural resonance frequency limit of monodisperse Fe₃O₄ nanoparticles via superparamagnetic/ferromagnetic relaxation. We observed that the cut-off frequency can be enhanced from 5.3 GHz for Fe₃O₄ to 6.9 GHz for Fe₃O₄@SiO₂ core-shell structure superparamagnetic nanoparticles, which are much higher than the natural resonance frequency of 1.3 GHz for Fe₃O₄ bulk material. In addition to the enhancement of cut-off frequency, the magnetic loss is significantly reduced via SiO₂ coating. This finding in superparamagnetic nanoparticles not only provides us a new approach to enhance the resonance frequency beyond the Snoek's limit, but also opens a new avenue for exploring superparamagnetic nanoparticles in microwave devices.

Results

Figures 1(a) and 1(b) illustrate the Transmission electron microscopy (TEM) micrographs and X-ray diffraction (XRD) patterns for as-prepared Fe₃O₄ nanoparticles and Fe₃O₄@SiO₂ core-shell composites, respectively. Fe₃O₄ nanoparticles have a regularly spherical morphology and an average size of 9.0 \pm 0.5 nm with a narrow size distribution of ($\sigma = 5\%$). Every Fe₃O₄ particle was coated by the SiO₂ shell after the magnetic collection process. For SiO₂ thickness of 8.0 nm, nearly every Fe₃O₄ core was located at the center of the coreshell structures, and the Fe₃O₄/SiO₂ core-shell nanoparticles became well-dispersed in ethanol, which provide an indirect evidence of the decrease of interparticle interaction. Although the particle size of Fe₃O₄ does not change obviously, the interspacing of nanoparticles increases via SiO₂-shell coating. XRD patterns of the samples indicate that all the highly crystalline peaks match well with the standard crystal phase of magnetite (JCPDS No. 894319, 19-0629). The broad peak around 15° to 35° presents the existence of amorphous-SiO₂.

In order to determine the effect of interparticle spacing on the collective magnetic behavior of the Fe_3O_4 nanoparticles, the temperature-dependent zero-field-cooled (ZFC) magnetization of the asprepared Fe_3O_4 and $Fe_3O_4@SiO_2$ core-shell structure nanoparticles is measured at a low magnetic field of 100 Oe and shown in Fig. 2. The maxima of the ZFC curves related to the blocking temperatures, $T_{\rm B}$, of superparamagnetic behavior shift from 86 K for as-prepared Fe₃O₄ nanoparticles to 37 K for Fe₃O₄@SiO₂. A similar trend was previously observed in dilute dispersed magnetic nanoparticles and by Monte Carlo simulations^{21,22}. The dipole-dipole interaction results in an additional energy barrier for the thermal fluctuations, and consequently increases the blocking temperature.

Since the value of the blocking temperature for a given particle is dependent upon the observation time, which is determined by the instrument used, it will be useful to collect information using various techniques with observation times different over a large range. Figures 3(a) and 3(b) illustrate the ⁵⁷Fe Mössbauer spectra collected at room temperature for as-prepared Fe₃O₄ nanoparticles and Fe₃O₄@SiO₂ core-shell nanoparticles, respectively. Although DC magnetization measurement indicates that a superparamagnetic behavior, the Mössbauer spectrum of as-prepared Fe₃O₄ nanoparticles shows clearly two strong sextets and a weak doublet (5%) at room temperature, suggesting that a ferromagnetic behavior is dominated in this sample. The concentration of ferromagnetic phase deceases to 54% for Fe_3O_4 coated with SiO₂ shell (Fig. 3(b)). The two sextets with hyperfine fields ($H_{\rm hf}$), and center shift (CS) of one (487.55 kOe and 0.32 mm/s) and the other (456.5 kOe and 0.66 mm/s) suggest the Fe^{3+} ions on the tetrahedral sites and $Fe^{2.5+}$ ($Fe^{2+}Fe^{3+}$) ions on the octahedral sites, respectively. The results are consistent with the room-temperature results observed for magnetite nanoparticles²³. The hyperfine fields are lower than those of the bulk material and the resonance lines are broadened. The change in the Mössbauer spectra is due to the finite size effect, which can cause a higher percentage of surface atoms, additional stresses between atoms, and superparamagnetic behavior²⁴. The stoichiometry of nanoparticles is




Figure 2 | Temperature-dependent zero-field-cooled (ZFC) magnetization of the as-prepared Fe₃O₄ and Fe₃O₄@SiO₂ nanoparticles.

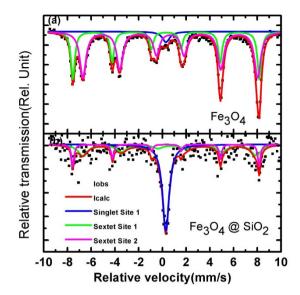


Figure 3 | Room-temperature 57 Fe Mössbauer spectra collected at for (a) as-prepared Fe₃O₄ nanoparticles, and (b) Fe₃O₄@SiO₂.

extracted by comparing the relative areas of the ^{Tet}Fe³⁺ and the ^{Oct}Fe^{2.5+} using the following equation $x = Fe^{2+}/Fe^{3+} = (1/2^{Oct}Fe^{2.5+})/(1/2^{Oct}Fe^{2.5+} + ^{Tet}Fe^{3+})$. According to the ratio of Fe²⁺ and Fe³⁺ of about 46.7%, one can deduce that the stoichiometry of nanoparticles is Fe³⁺₂ + $_{0.066}Fe^{2+}_{1-0.066}O_4$. The possible reason for the slightly shift of Fe³⁺ : Fe²⁺ = 2:1 is partly oxidation of Fe²⁺ ions on the surface layer or slight presence of vacancies in tetrahedral sites.

The different results obtained from Mössbauer spectra with those from DC magnetization measurements can be explained by the relationship between relaxation time τ and the experimental observation time, τ_{obs} . It is well known that the magnetic behavior of a particle is dependent on the experimental observation time, τ_{obs} . For $\tau_{obs} \ll \tau$, the particle shows ferromagnetic behavior, while for $\tau_{obs} \gg \tau$, the particle is superparamagnetic behavior. Since the experimental observation time for Mössbauer measurements ($\tau_{obs} \sim 10 \text{ ns}$) is significantly shorter than that for DC magnetization measurements ($\tau_{obs} \sim 10 \text{ ns}$), a superparamagnetic behavior obtained DC magnetization measurements can behaves as ferromagnetism in shorter observation time scale, such as Mössbauer measurements. In other word, we can expect the superparamagnetic behavior can transit to ferromagnetic one in higher frequency regime.

In order to confirm our expectation, the frequency dependence of relative complex permeability, $\mu_r = \mu' - j\mu''$, is measured in the frequency range of 0.1–10.0 GHz. It reveals that the real part, μ' exhibit a relaxation behavior and decreases with increasing from 0.1 GHz to 2.0 GHz, and keeps a constant with further increasing frequency(Fig. 4(a)). An abrupt decrease to less than 1.0 was observed at 5.3 GHz and 6.9 GHz for the as-prepared Fe₃O₄ nano-particles and Fe₃O₄/SiO₂ core-shell particles. The negative excursion in the real part of the susceptibility($\chi' = \mu' - 1$) implies a resonant behavior. The resonant behavior was more evident by the two peaks in the curves of the frequency dependence of imaginary part, μ'' (Fig. 4(b)).

According to the Kittel equation, the natural resonance frequency of a sphere-shaped magnetic particle is²⁵

$$f_r = \frac{\gamma H_K}{2\pi} \tag{2}$$

where γ is the gyro-magnetic ratio. For cubic symmetric system, the magnetocrystalline anisotropy field, $H_K = \frac{4|K_1|}{3\mu_0 M_S}$. Using the

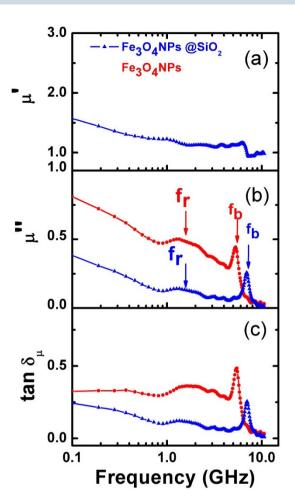


Figure 4 | (a) Frequency dependence of real part μ' ; (b) imaginary part μ'' and (c) magnetic loss tangent $\tan \delta_{\mu} = \mu''/\mu'$ of the Fe₃O₄/paraffin wax and Fe₃O₄@SiO₂/paraffin wax.

magnetocrystalline anisotropy constant $K_1 = -1.2 \times 10^4$ J/m³ and saturation magnetization $M_S = 4.6 \times 10^5$ A/m for single crystal Fe₃O₄²⁶, the theoretical calculation of the natural resonance frequency should be 1.5 GHz. Therefore, the first peak around at 1.3 GHz was assigned to the natural resonance frequency. The lower resonance frequency is related to the slightly smaller magnetocrystalline anisotropy for nonstoichiometric magnetite nanoparticles²⁶.

The second peak at 5.3 GHz and 6.9 GHz for the two samples is attributed to the superparamagnetism/ferromagnetic transition relaxation rate, f_{b} , respectively. In addition to the relaxation behavior, a resonance behavior was also predicted and observed at a frequency in the range of 30–60 MHz in a number of ferrofluids^{15,16}. In the case of a single particle, the results calculated by Raikher and Shliomus demonstrated that the transition between the region of the relaxation and resonance behaviors was depended on the ratio of the magnetic anisotropy energy to the thermal energy ($\alpha = KV_P/k_BT$) and occurred for $\alpha \approx 0.7^{15}$. By using the magnetic anisotropy constant and the grain size of Fe₃O₄ nanoparticles, $\alpha \approx 0.85$ can be derived. Therefore, the dispersion of $\mu_r(f)$ for our samples has both relaxation and resonance characteristics.

The calculated magnetic phase diagram against frequency for nanoparticle assembly by Haesegawa et al. demonstrates that the transition from superparamagnetic state to no response state is strongly dependent upon the ratio of the effectively thermal field of $H_t = k_B T/V_P \mu_0 M_S$ to effectively magnetic anisotropy field H_K^{27} . In the case of $H_t < H_K$, with increasing frequency, nanoparticle assembly undergoes from superparamagnetic state into no response state through ferromagnetic state. In this case, f_b can be written as²⁷,

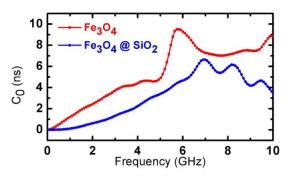


Figure 5 | The value of $C_0 (C_0 = \mu''/(\mu')^2 f = 2\pi\mu_0\sigma d^2/3)$ as a function of frequency $\tan \delta_{\mu} = \mu''/\mu'$ of the Fe₃O₄/paraffin wax and Fe₃O₄@SiO₂/paraffin wax.

$$f_b = \frac{\gamma \alpha}{\pi (1 + \alpha^2)} H_K \exp\left(-\frac{H_K M_S V_P}{2k_B T}\right)$$
(3)

where α is the Gilbert damping constant.

Eq.(3) suggests that f_b corresponds to a relaxation time for the Gillbert damping of the moment under H_K . Hence, f_b can not exceeds f_r and decreases drastically with increasing the particle size.

 f_r and decreases drastically with increasing the random rando

$$f_b = \frac{\gamma \alpha}{\pi (1 + \alpha^2)} H_t = \frac{\gamma \alpha}{\pi (1 + \alpha^2) V_P M_S}$$
(4)

Eq. (4) suggests that the f_b can be interpreted as a resonance frequency originating from the Gilbert damping under thermal field. Thus, f_b can be increased by decreasing V_P , and consequently the relaxation loss peak is higher than the natural resonance frequency of 1.3 GHz for Fe₃O₄ bulk material.

Since the nanoparticle sizes between Fe_3O_4 and $Fe_3O_4@SiO_2$ coreshell nanoparticles are almost same, the enhancement of the relaxation rate in Fe_3O_4/SiO_2 core-shell nanoparticles is resulted from the reduction of dipole-dipole interaction. In our previous work^{20,21}, we found the blocking temperature increases with the strength of dipolar interaction. Therefore, the relaxation rate will increase by SiO₂ coating, at which the dipolar interaction is weakened.

The magnetic loss tangent tan δ_{μ} varies smoothly in the frequency range from 0.1 GHz to 5 GHz, reaches a maximum value at the blocking frequency (Figure 4(c)). It was known that the microwave magnetic loss of magnetic materials originates mainly from hysteresis, domain wall resonance, eddy current effect and the natural ferromagnetic resonance. The hysteresis loss comes from irreversible magnetization and is negligible in a weak applied field. The domain wall resonance occurs only in multidomain materials and usually in the 1-100 MHz range. In this study the permeabilities were measured at a low microwave power and over a frequency range of 0.1-10.0 GHz, so neither hysteresis loss nor domain wall resonance is the main contributor to magnetic loss. The eddy current loss is related to the diameter of nanoparticles d and the electric conductivity σ , which can be expressed by $\mu'' \approx 2\pi\mu_0(\mu')^2\sigma d^2 f/3$, where μ_0 is the permeability of vacuum. If the magnetic loss only results from eddy current loss, the value of C_0 ($C_0 = \mu''/(\mu')^2 f = 2\pi\mu_0\sigma d^2/3$) should be a constant when the frequency is varied²⁸. As shown in Fig. 5, the values markedly decrease with increasing frequency at 0.1-10.0 GHz, suggesting the magnetic loss is not related to eddy current. Therefore, it can be explained that the peak of magnetic loss at 5.3 and 6.9 GHz is caused by the blocking resonance between superparamagnetism and ferromagnetism. Moreover, the SiO₂ coating also results in the reduction of magnetic loss.

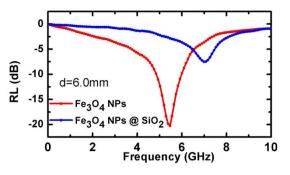


Figure 6 | Frequency dependence of calculated RL for of the Fe₃O₄/ paraffin wax and Fe₃O₄@SiO₂/paraffin wax.

Discussion

According to the transmission line theory, for a single layer absorber with a backed metal plate, the reflection loss (RL) curves were simulated from the electromagnetic parameters at various sample thicknesses by means of the following expressions²⁹:

$$Z_{in} = Z_0 (\mu_r / \varepsilon_r)^{1/2} \tanh\left[j2\pi f d/c\right) (\mu_r \varepsilon_r)^{1/2} \right]$$
(5)

$$RL = 20 \log |(Z_{in} - Z_0) / (Z_{in} + Z_0)|$$
(6)

where *f* is the frequency of the electromagnetic wave, *d* is the thickness of the sample, *c* is the velocity of light, Z_0 is the impedance of air, and Z_{in} is the input impedance of the sample.

Figure 6 illustrates the frequency dependence of *RL* for these two samples with thickness of 6.0 mm. It was observed the magnitude of absolute value of reflection loss of |RL| decrease from 20.3 dB for asprepared Fe₃O₄ to 7.5 dB for Fe₃O₄ coated with SiO₂ shell. In addition, a considerable reduction of *RL* can be obtained by SiO₂-coating in whole frequency range of 0.1–10.0 GHz. The higher resonance frequency and lower magnetic loss make the Fe₃O₄@SiO₂ core-shell nanoparticles suitable for high frequency application.

In conclusion, we have demonstrated that the high frequency properties of core-shell Fe_3O_4/SiO_2 superparamgnetic nanoparticles can be tuned via dipolar interaction. The cut-off frequency can exceed the natural resonance frequency by superparamagnetic/ ferromagnetism transition. In addition, the magnetic loss is significantly reduced via SiO_2 coating. The finding of non-gyromagnetic resonance mechanism in superparamagnetic nanoparticles not only provides us a new approach to enhance the resonance frequency beyond the Snoek's limit, but also opens a new application field for superparamagnetic nanoparticles.

Methods

Monodisperse Fe_3O_4 nanoparticles with 9.0 \pm 0.5 nm diameter were synthesized in octadecene, instead of the dioctyl ether used in a synthesis procedure reported in Refs. 30 and 31. SiO₂ coating onto the Fe_3O_4 nanoparticles was carried out in reverse micelles by the hydrolysis of tetraethyl orthosilicate^{19,29}. Transmission electron microscopy (TEM) was performed on HITACHI H8100 at 120 kV to determine particle shape and size distribution. X-ray diffraction (XRD) patterns were used to characterize the crystal structure of the samples using a step-scanning with 0.02° step and 5 s integration time. 57Fe Mössbauer spectra at room temperature were recorded by a Wissel system constant acceleration Mössbauer spectroscopy system with a 57Co (Rh) source. The values of CS given here are relative to the room temperature value of α-Fe. DC magnetization measurements were performed on a Superconducting Quantum Design (SQUID) magnetometer (MPMS-XL). Zero-field-cooled (ZFC) DC magnetization measurements were carried from room temperature to 10 K at a field of 100 Oe. For magnetic and dielectric spectra measurements, the Fe₃O₄/paraffin wax mixtures were prepared by homogenously mixing Fe₃O₄ and Fe₃O₄@SiO₂ nanoparticles with paraffin wax with a mass ratio of 7:3 and then pressed into the toroidalshaped samples of 7.00 mm outer diameter and 3.04 mm inner diameter. The scattering parameters (S₁₁ and S₂₁) were measured by a vector network analyzer (Agilent N5224A) using a coaxial transmission-reflection method in the frequency range of 0.1–10 GHz. The complex permeability, μ_r , and permittivity, ϵ_r , were determined from the scattering parameters using the Nicolson models³².

- 1. Yen, T. J. et al. Terahertz magnetic response from artificial materials. Science 303, 1494-1496 (2004).
- Kobljanskyj, Y. et al. Nano-structured magnetic metamaterial with enhanced 2 nonlinear properties. Sci. Rep. 2, 478 (2012).
- Kampfrath, T. et al. Terahertz spin current pulses controlled by magnetic heterostructures. Nature Nanotech. 8, 256-260 (2013).
- Harris, V. G. Modern Microwave Ferrites. IEEE Trans on Magn. 48, 1075-1104 4. (2012)
- 5. Wang, S. X. et al. Properties of a new soft magnetic material. Nature 407, 150-151 (2000)
- Greve, H. et al. Nanostructure magnetic Fe-Ni-Co/Teflon multilayers for high-6. frequency applications in gigahertz range. Appl. Phys. Lett. 89, 242501 (2006).
- Sohn, J. et al. Tunable electromagnetic noise suppressor integrated with a magnetic thin film. Appl. Phys. Lett. 89, 103501 (2006).
- Fan, X. L. et al. In situ fabrication of Co₉₀Nb₁₀ soft magnetic thin films with adjustable resonance frequency from 1.3 to 4.9 GHz. Appl. Phys. Lett. 92, 222505 (2008).
- Chai, G. Z. et al. Adjust the resonance frequency of (Co₉₀Nb₁₀/Ta)_n multilayers 9. from 1.4 to 6.5 GHz by controlling the thickness of Ta interlayers. Appl. Phys. Lett. 96, 012505 (2010).
- 10. Snoek, J. L. Gyromagnetic resonance in ferrites. Nature 160, 90 (1947).
- 11. Zeng, H. et al. Exchange-coupled nanocomposite magnets by nanoparticle selfassembly. Nature 420, 395-398 (2002).
- 12. Nam, J. M., Thaxton, C. S. & Mirkin, C. A. Nanoparticle-Based Bio-Bar Codes for the Ultrasensitive Detection of Proteins. Science 301, 1884-1886 (2003).
- 13. Hoffmann, C. et al. Spatiotemporal control of microtubule nucleation and assembly using magnetic nanoparticles. Nature Nanotech. 8, 199-205 (2013).
- 14. Liu, J. W. et al. Microwave Absorption Enhancement of Multifunctional Composite Microspheres with Spinel Fe₃O₄ Cores and Anatase TiO₂ Shells. Small 8, 1214-1221 (2012).
- 15. Raikher, Y. L. & Shliomis, M. I. Dispersion theory of magnetic-susceptibility of small ferromagnetic particles. Zhrunal Eksperimentalnoi Teoreticheskoifiziki. 67, 1060-1073 (1974).
- 16. Fannin, P. C., Scaife, B. K. P. & Charles, S. W. Relaxation and resonance in ferrofluids. J. Magn. Magn. Mater. 122, 159-162 (1993).
- 17. Brown, W. F. Thermal fluctuations of a single-domain particle. Phys. Rev. 130, 1677-1686 (1963)
- 18. Skumryev, V. et al. Beating the superparamagnetic limit with exchange bias. Nature 423, 850-853 (2003).
- 19. Kim, H. K. D. et al. Magnetoelectric control of superparamagnetism. Nano. Lett. dx.doi.org/10.1021/nl3034637 (2013).
- 20. Yang, H. T. et al. Achieving a noninteracting magnetic nanoparticle system
- through direct control of interparticle spacing. Appl. Phys. Lett. 94, 013103 (2009). 21. Yang, H. T. et al. Determination of the critical interspacing for the noninteracting magnetic nanoparticle system. Appl. Phys. Lett. 98, 153112 (2011).
- 22. García-Otero, J., Porto, M., Rivas, J. & Bunde, A. Influence of dipolar interaction on magnetic properties of ultrafine ferromagnetic particles. Phys. Rev. Lett. 84, 167(2000)
- 23. Lima Jr, E. et al. Surface effects in the magnetic properties of crystalline 3 nm ferrite nanoparticles chemically synthesized. J. Appl. Phys. 108, 103919 (2010).

- 24. Gorski, C. A. & Scherer, M. M. Determination of nanoparticulate magnetite stoichiometry by Mossbauer spectroscopy, acidic dissolution, and powder X-ray diffraction: A critical review. Am. Mineral. 95, 1017-1026 (2010).
- 25. Kittel, C. On the theory of ferromagnetic resonance absorption. Phys. Rev. 73, 155-161 (1948).
- 26. Aragon, R. Cubic magnetic anisotropy of nonstoichiometric magnetite. Phys. Rev. B. 46, 5334-5338 (1992).
- 27. Hasegawa, D., Yang, H. T., Ogawa, T. & Takahashi, M. Challenge of ultra high frequency limit of permeability for magnetic nanoparticle assembly with organic polymer-Application of superparamgnetism. J Magn. Magn. Mater. 321, 746-749 (2009)
- 28. Wu, M. Z. et al. Microwave magnetic properties of Co₅₀/(SiO₂)₅₀ nanoparticles. Appl. Phys. Lett. 80, 4404-4406 (2002).
- 29. Davalos, A. L. & Zanette, A. Fundamentals of Electromagnetism (Springer Verlag, Berlin 1999).
- 30. Sun, S. & Zeng, H. Size-controlled synthesis of magnetite nanoparticles. J. Am. Chem. Soc. 124, 8204-8205 (2002).
- 31. Song, N. N. et al. Non-monotonic Size Change of Monodisperse Fe₃O₄ Nanoparticles in the Scale-up Synthesis. Nanoscale 5, 2804-2808 (2013).
- 32. Nicolson, A. M. & Ross, G. F. Measurement of intrinsic properties of materials by time-domain techniques. IEEE Transactions on Instrumentation and Measurement. IM19, 377-382 (1970).

Acknowledgments

This work was supported by the National Basic Research Program of China (973 program, Grant Nos. 2012CB933102, 2011CB921801 and 2010CB93420) and the National Natural Sciences Foundation of China (11174351, 11034004, and 51021061).

Author contributions

Z.H.C. and H.T.Y. planned the experiments. N.N.S. prepared the samples and carried out the microwave experiments. H.L.L. performed Monte Carlo calculations; R.X., H.F.D. and X.Q.Z. contributed to the analysis and discussion for the results. Z.H.C. wrote the paper and all authors comment on it.

Additional information

Competing financial interests: The authors declare no competing financial interests.

How to cite this article: Song, N. et al. Exceeding natural resonance frequency limit of monodisperse Fe₃O₄ nanoparticles via superparamagnetic relaxation. Sci. Rep. 3, 3161; DOI:10.1038/srep03161 (2013).



This work is licensed under a Creative Commons Attribution-

This work is licensed under a Creative Commons Annocement NonCommercial-ShareAlike 3.0 Unported license. To view a copy of this license, visit http://creativecommons.org/licenses/by-nc-sa/3.0